BATTERY CHARGERS

CURTIS

PICCOLO



DESCRIPTION

The Piccolo battery charger works from a single-phase supply to re-charge wet-cell batteries over a 12 hour period and is available in either 12V or 24V models.

APPLICATION

The Piccolo is ideal for use with order pickers, pallet trucks, sweeper/scrubbers, stackers, tugs, mobility, golf and leisure vehicles.

FEATURES

- Single-phase mains supply 230VAC 50/60Hz with adjustments for 220V and 240 voltages 5 x 3W LEDs.
- Control board suitable for 12V and 24V batteries.
- Automatic equalizing function with pulses packet.
- Automatic weekly maintenance function to keep the batteries charged during the non-use periods.
- Weekend maintenance option ensures batteries maintain their charge during non-use periods.
- Anti-noise filtering and overvoltage protection.
- Nine-hour security timer on the first phase.
- Automatic detection of battery connection and auto power-off.
- Electrical Protection: mains power and battery fuses.
- Final charge voltage threshold settled (no trimmer adjustment required).
- IP20 Rating.


CURTIS INSTRUMENTS, (UK) LTD.
5 UPPER PRIORY STREET
NORTHAMPTON NN1 2PT, ENGLAND
TEL 44 (0) 1604-629755
FAX 44 (0) 1604-629876

PICCOLO

SPECIFICATIONS

Model	Battery Ah 10 + 11 h	Voltage	Box Dimensions (in)
12V / 10A	60 ÷ 75	230	12 (L) 11 (W) 10,5 (H)
12V / 15A	90 ÷ 105		
12V / 20A	110 ÷ 140		
12V / 25A	150 ÷ 175		
12V / 30A	180 ÷ 210		
12V / 40A	230 ÷ 280		
24V / 10A	60 ÷ 75		
24V / 15A	90 ÷ 105		
24V / 20A	110 ÷ 140		
24V / 25A	150 ÷ 175		
24V / 30A	180 ÷ 210		
24V / 40A	230 ÷ 280		
24V / 50A	300 ÷ 340		20 (L) 12 (P) 12 (H)
24V / 60A	350 ÷ 400		

CHARGING GRAPH "WA"

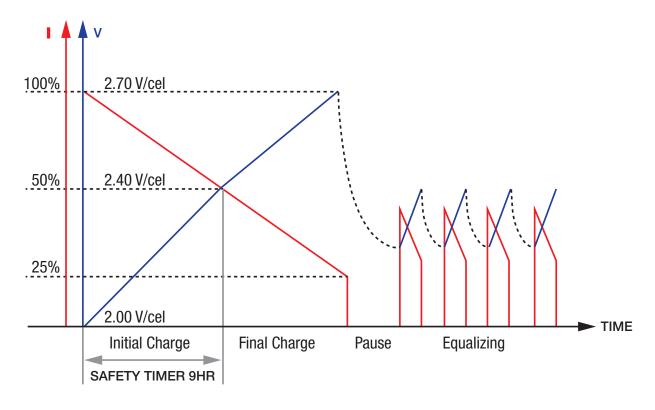

WARRANTY

Three year limited warranty from time of delivery.