




CURTIS

Instrumentation

Digital Instrumentation

enGage® IV

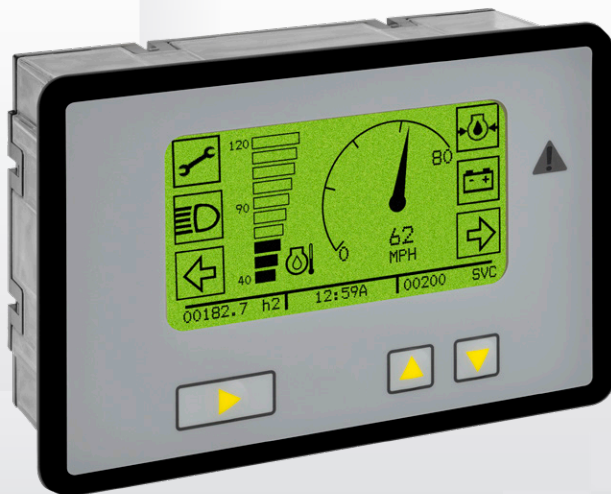






Digital Instrumentation

The Curtis enGage® IV is a microprocessor based instrument panel that can be customized to monitor, display and control numerous vehicle functions in a single integrated package. The panel is fully CANopen compatible.

See a 360° view of the enGage® IV at:
curtisstruments.com/360view

FEATURES

- ▶ Fully customizable instrument. You design your own instrument to your specific applications and needs, with a wide palette of possibilities.
- ▶ Analog, digital & CAN functionality in one instrument. All aspects of vehicle management, control and display can be accommodated.
- ▶ CAN communication allows seamless interconnectivity with other system components, such as motor controllers.
- ▶ Microprocessor based logic eliminates or reduces the need for auxiliary vehicle circuits, such as timing circuits.
- ▶ One hardware set can be instantly programmed into a wide range of OEM specified instrumentation for use in a variety of different vehicles.
- ▶ Large, easy-to-read dot matrix LCD is backlit for ideal viewing in all lighting conditions.
- ▶ Variety of different backlighting choices available – green and white are standard.
- ▶ enGage® IV replaces up to 4 gauges. OEMs can view up to 4 traditional gauge functions simultaneously in a variety of styles including numeric, bar or simulated needle.
- ▶ Up to 6 switched inputs are available to track status of critical vehicle parameters, such as over-temperature, parking break, low-fuel, etc.
- ▶ Displays can include multiple warning icons and an advisory line for hour meters, maintenance monitors and time-of-day clock.

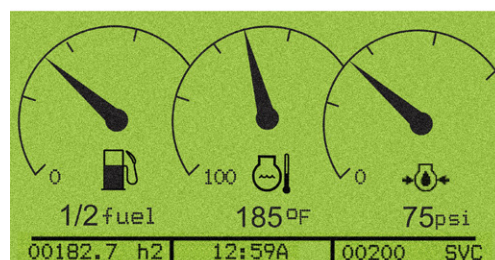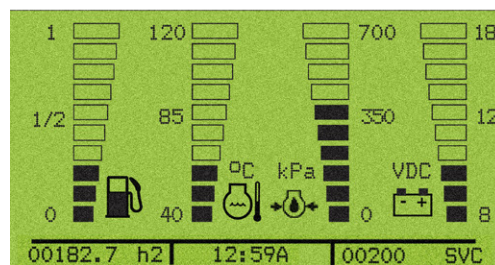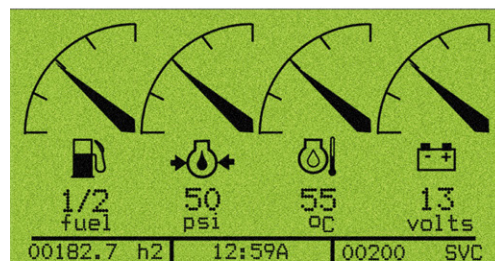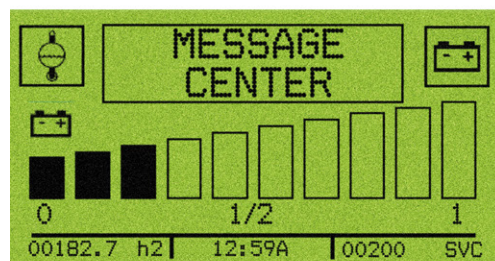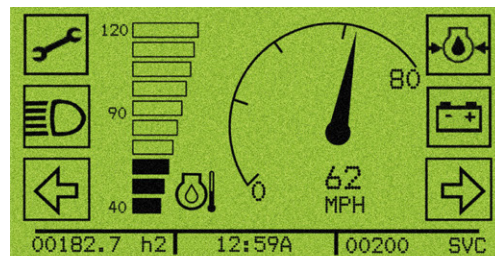




Digital Instrumentation

FEATURES continued


- ▶ Provides more information, such as diagnostics to the operator, while eliminating unnecessary wiring.
- ▶ Password protected, enabled field-programming of maintenance monitoring, elapsed time and battery discharge profiles matches the panel to the specific user application.
- ▶ Visual warnings include flashing LCD icons and bargraph segments, and dual color warning LED.
- ▶ Three 1-Amp FETs are used to control OEM specified vehicle functions, such as alarms, lift-lockout, etc.
- ▶ For battery powered vehicles, innovative Curtis battery monitoring technology provide reliable state-of-charge information.
- ▶ It's easy for the operator to access and change parameters and display menus with accessible front panel buttons.
- ▶ IP65 rated front panel (IP 40 rear) assures performance in the harshest environments.
- ▶ Easy Snap-Fit design and integrated connector lowers production costs by eliminating traditional mounting hardware kits. (Optional mounting bracket available.)
- ▶ Available in an M-style housing for front (with overlay) panel mounting or behind (without overlay) panel mounting, T-style housing for front panel mounting or P-style module for behind panel mounting for OEM design flexibility.
- ▶ Reliable solid-state design means no moving parts to wear out.
- ▶ Attractive contemporary styling enhances vehicle design and maximizes readability.



T-Style

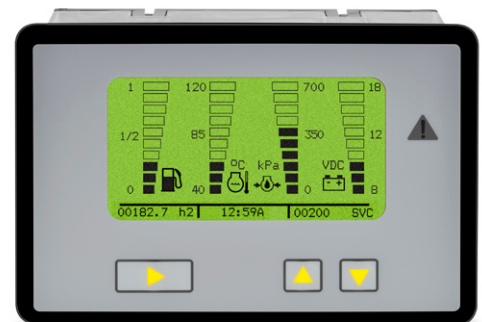

M-Style with overlay

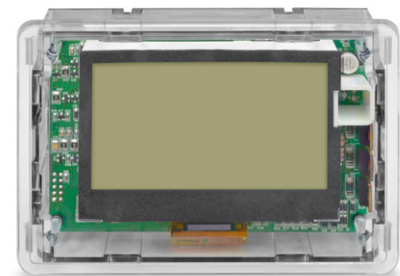

M-Style without overlay



Digital Instrumentation

SPECIFICATIONS

Case and Bezel Material

M Housing: Polycarbonate, clear with black painted bezel;

T Housing: ABS Polycarbonate Resin, black.

Lens Material – T Housing

PMMA.

Module Specifications

All modules are supplied with critical components exposed. If the module is being used in an environment other than specified, the user must take precautions to package the module to provide adequate protection.

Main Interface Connector

20-pin AMP Mini Universal Mate-N-Lok. (female mating AMP part number 770585-1).

CAN & SIO Interface Connector

12-pin AMP Mini Universal Mate-N-Lok (female mating AMP part number 770581-1).

Operating voltages

Auto-ranging –12V to 80V DC \pm 25% (9V to 100V DC).

Operating temperature

–40°C to +70°C.

Storage temperature

–50°C to +90°C.

Humidity (Applicable To Enclosed Units Only):

95% RH (non-condensing) at +38°C as per SAE J1455, section 4.2.3.

Note: Module requirements may be reduced.

Mechanical Shock (Applicable To Enclosed Units Only):

SAE J 1378 March 83.

Amplitude 44–55g, half sine, 9–13ms duration.

Vibration (Applicable To Enclosed Units Only):

SAE J 1378 March 83 Double amplitude of 1.53mm with frequency sweep for 10-80-10 Hz (20g max) at 1 minute intervals.

Sealing (Applicable To Enclosed Units Only):

IP-65 (face), IP-40 (rear).

Thermal Cycling

As per SAE J1455 section 4.1.3.1. to +80°C.

Thermal Shock

As per SAE J1455 section 4.1.3.2. to +80°C.


Salt Spray / Fog (Applicable To Enclosed Units Only):

ASTM B 117-73 as per SAE J1810, section 4.7.1.2.

Regulatory Approval

Manufactured under ISO 9001 certified Quality Management System. UL recognized & CE certified.

CONNECTOR PINOUT

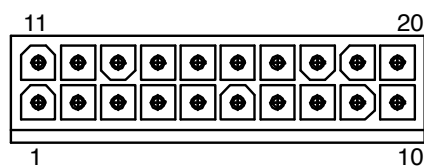


Connector J1

Pin	Description	Pin	Description
1	Battery + (B+)	11	Switched Input 5
2	Battery – (B–)	12	Switched Input 6
3	Sender 1 I/O (R, V, I)	13	Keyswitch Input
4	Sender 2 I/O (R, V, I)	14	MOSFET Output 1
5	Sender 3 I/O (R, V, I)*	15	MOSFET Output 2
6	Sender 4 I/O (R, V, I)	16	MOSFET Output 3
7	Switched Input 1	17	3210=Range select ***
8	Switched Input 2	17	3211=NC
9	Switched Input 3	18	Sender 4**
10	Switched Input 4	19	LCD Heater
		20	Dim Control

* Input for: Speedometer

** Input for: Tachometer

*** GND: 36V, 72V; B+: 24V, 60V; OPEN: 12V, 48V, 80V

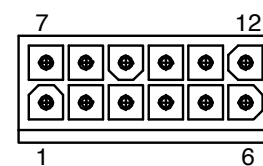

Connector J2

Pin	Description	Pin	Description
1	CAN H	7	N/C
2	CAN L	8	N/C
3	CAN Shield Ground	9	SCI - Rx
4	N/C	10	SCI - Ground
5	CAN Term 1	11	SCI - Tx
6	CAN Term 2	12	+7V Out (<10mA)

AMP Mating Connectors


	J1	J2
Connector	AMP P/N 770585-1	AMP P/N 770581-1
Pin	AMP P/N 770904-1 FOR 18-22 AWG WIRE	



Digital Instrumentation


DIMENSIONS mm

3200T Cased Unit Weight 400g max

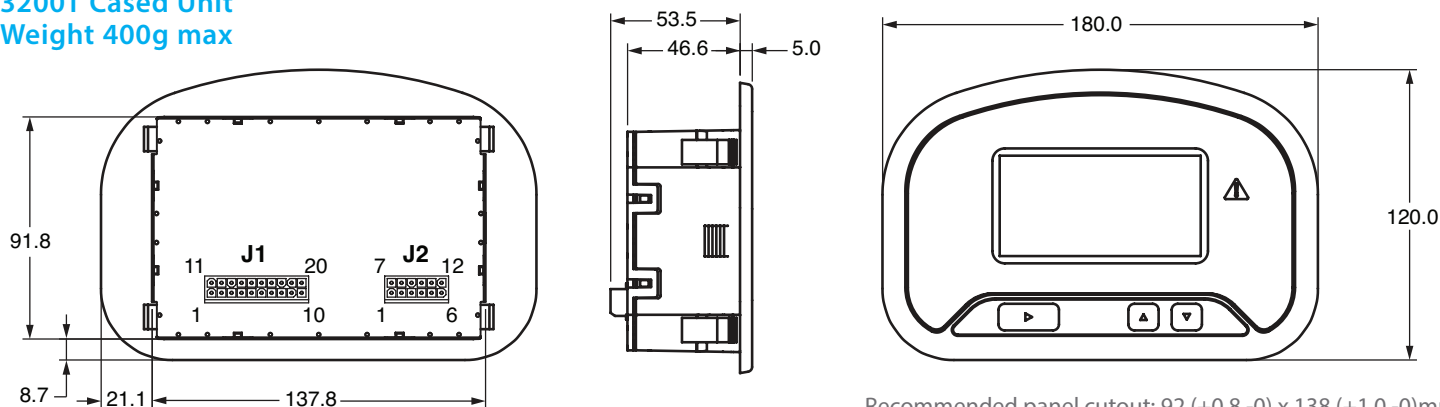


Recommended panel cutout: 92 (+0.8,-0) x 138 (+1.0,-0)mm
 Acceptable panel thickness (snap-fit fingers): 0.8 to 3.8mm
 Acceptable panel thickness (bracket): 5.0 to 8.9mm

3200P Module Weight 200g max

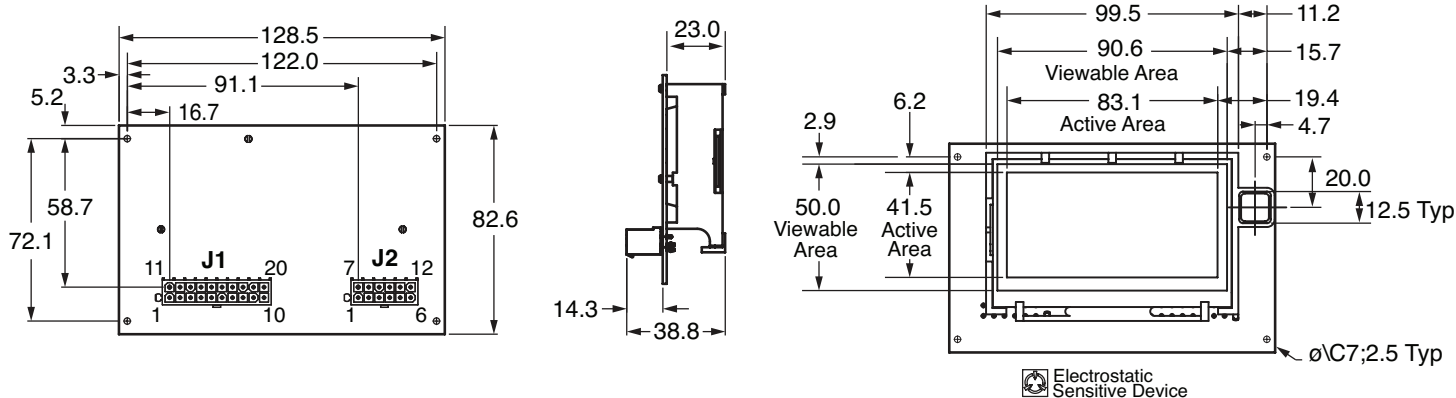

Electrostatic Sensitive Device

3200M Case Unit Weight 330g max

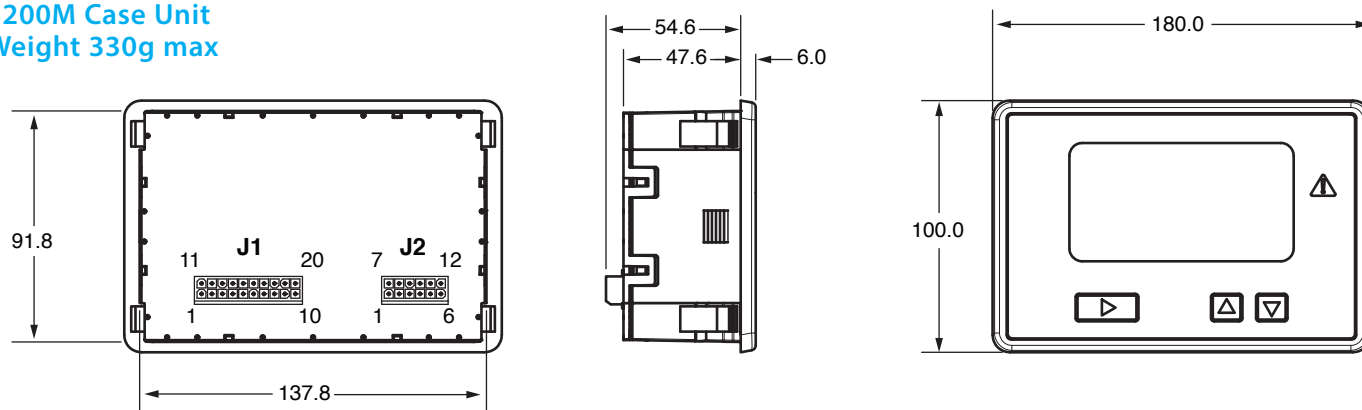

WARRANTY Two year limited warranty from time of delivery.



is a trademark of Curtis Instruments, Inc.

Specifications subject to change without notice

©2018 Curtis Instruments, Inc.

50125 REV E 3/18