



Model **1356** & **1356P**

CAN Expansion Modules



Parker Hannifin Corporation
Electronic Controls & Motion Division
200 Kisco Ave
Mt. Kisco, NY 10549
phone 1. 914.666.2971

www.parker.com/ecm

53221 Rev A 03/26

© 2026 Parker Hannifin Corporation

Specifications are subject to change without notice.
© 2026 Curtis Instruments, Inc. © Curtis is a registered trademark of Parker Hannifin.
© The design and appearance of the products depicted herein are the copyright of Parker Hannifin.

Part Number: 53221
Revision A March 2026

 Read Instructions Carefully!

Safety Warning:

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE. This document and other information from Parker-Hannifin Corporation, its subsidiaries and authorized distributors provide product or system options for further investigation by users having technical expertise. The user, through its own analysis and testing, is solely responsible for making the final selection of the system and components and assuring that all performance, endurance, maintenance, safety and warning requirements of the application are met. The user must analyze all aspects of the application, follow applicable industry standards, and follow the information concerning the product in the current product catalog and in any other materials provided from Parker or its subsidiaries or authorized distributors. To the extent that Parker or its subsidiaries or authorized distributors provide component or system options based upon data or specifications provided by the user, the user is responsible for determining that such data and specifications are suitable and sufficient for all applications and reasonably foreseeable uses of the components or systems...[Click here to view all product safety information.](#)

TABLE OF CONTENTS

CHAPTERS

1: OVERVIEW	1
DESCRIPTIONS OF KEY FEATURES	2
ACTIVE-HIGH DIGITAL INPUTS	2
HIGH-FREQUENCY DRIVER OUTPUTS	2
CONSTANT CURRENT OR VOLTAGE OUTPUTS.....	2
PROGRAMMABLE DITHER FOR HYDRAULIC VALVES.....	3
VOLTAGE ANALOG INPUTS	3
RESISTIVE SENSOR INPUTS	3
VIRTUAL DIGITAL INPUTS.....	3
ENCODER INTERFACE.....	3
CAN INTERFACE	3
PDO DYNAMIC MAPPING	3
ONLINE UPDATE	4
STATUS LED'S	4
2: INSTALLATION AND WIRING	5
MOUNTING THE MODULE.....	5
CONNECTIONS	7
WIRING RECOMMENDATIONS	8
WIRING: BASIC CONFIGURATION.....	9
POWER CONNECTION	10
DRIVER OUTPUTS	10
SWITCH INPUTS.....	10
ANALOG INPUTS	10
CAN BUS	10
WIRING: APPLICATION EXAMPLE	11

TABLE OF CONTENTS cont'd

INPUT/OUTPUT SIGNAL SPECIFICATIONS	12
DIGITAL INPUTS	12
DRIVER OUTPUTS	13
ANALOG INPUTS	14
ENCODER INPUTS	14
SERIAL PORT	15
CAN BUS INTERFACE	15
AUXILIARY POWER SUPPLIES	16
POWER	16
3: CANOPEN COMMUNICATIONS	17
MINIMUM STATE MACHINE	17
NMT MESSAGES	19
EMERGENCY MESSAGES	20
HEARTBEAT	20
4: PDO COMMUNICATIONS	21
5: SDO COMMUNICATIONS	24
SDO REQUEST (SDO-RX)	24
SDO 1356/1356P RESPONSE (SDO-TX)	25
USING AN SDO TO MAP A PDO	25
TYPES OF SDO OBJECTS	26
COMMUNICATION PROFILE OBJECTS	27
PARAMETER PROFILE OBJECTS	33
MONITOR PARAMETER PROFILE OBJECTS	38
6: DIAGNOSTICS AND TROUBLESHOOTING	40
FAULT LOG	42

TABLE OF CONTENTS cont'd

7: SERIAL COMMUNICATIONS & PROGRAMMING	43
PROGRAM MENUS	43
MONITOR MENUS	47
FAULT MENU	49
APPENDIX A.....	50
ELECTROMAGNETIC COMPATIBILITY (EMC)	50
ELECTROSTATIC DISCHARGE (ESD).....	51
APPENDIX B.....	52
PC PROGRAMMING STATION (1314)	52
HANDHELD PROGRAMMER (1313).....	52
PROGRAMMER FUNCTIONS	52
APPENDIX C.....	53
SPECIFICATIONS.....	53

TABLE OF CONTENTS cont'd

FIGURES

FIGURE 1-1 CURTIS 1356 AND 1356P CAN EXPANSION MODULES.	1
FIGURE 2-1 MOUNTING DIMENSIONS, CURTIS 1356 AND 1356P EXPANSION MODULES.	5
FIGURE 2-2 BASIC WIRING DIAGRAM, CURTIS 1356/1356P CAN EXPANSION MODULE.....	9
FIGURE 2-3 APPLICATION EXAMPLE, CURTIS 1356/1356P CAN EXPANSION MODULE.....	11

TABLES

TABLE 2-1 PIN MOLEX CONNECTOR PIN ASSIGNMENT	7
TABLE 2-2 PIN MOLEX CONNECTOR PIN ASSIGNMENT	8
TABLE 5-1 COMMUNICATION PROFILE OBJECT DICTIONARY	27
TABLE 5-1 COMMUNICATION OBJECTS, CONT'D	30
TABLE 5-1A MANUFACTURER'S STATUS REGISTER	31
TABLE 5-1B STORE PARAMETER OBJECT	31
TABLE 5-1C RESTORE DEFAULT PARAMETERS OBJECT	32
TABLE 5-2 PARAMETER PROFILE OBJECT DICTIONARY	33
TABLE 5-3 MONITOR PROFILE OBJECT DICTIONARY	38
TABLE 6-1 TROUBLESHOOTING CHART	41
TABLE 7-1 PROGRAM MENUS: 1313/1314 PROGRAMMER	43
TABLE 7-2 MONITOR MENUS: 1313/1314 PROGRAMMER.....	47
TABLE C-1 SPECIFICATIONS: 1356/1356P MODULE.....	53

1 – OVERVIEW

The Curtis 1356 and 1356P are CAN expansion modules that provide simple, flexible, and low-cost control of up to 18 I/O, two high-frequency driver outputs, one encoder input, and five analog inputs. These modules can be used on electric vehicles and internal combustion engines.

The 1356/1356P can extend the I/O capabilities of any Curtis VCL-driven system and enhance systems that use Curtis AC controllers by providing additional I/O. These expansion modules have

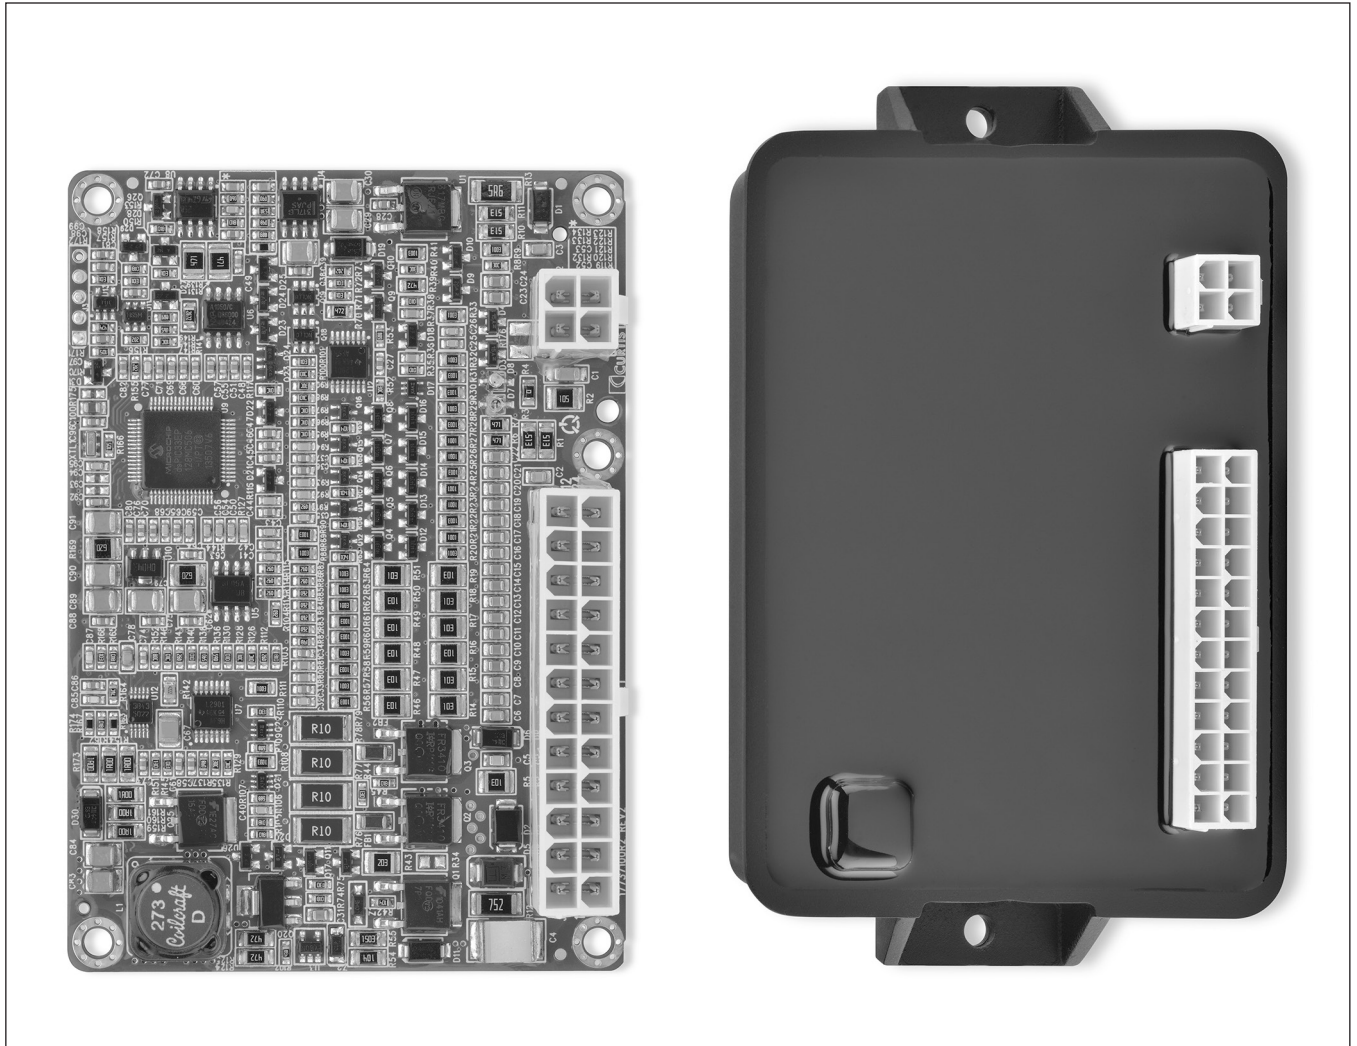


Figure 1-1
Curtis 1356 and 1356P CAN expansion modules.

the flexibility to be used in many applications, such as Mobile Elevating Work Platforms (MEWPs), electric forklifts, aerial lifts, etc.

Two versions of the module are available. The 1356 is a PCBA for which customers develop their cases to provide environmental protection. The 1356P comes potted with a plastic tray that provides IP65 water and dust immunity for its electronics.

Features include:

- Eleven active-high digital inputs
- Two high-frequency driver outputs (1 amp and 3 amps), which can also be used as active-high digital inputs.
- Closed loop Constant Current, Constant Voltage, or direct PWM control on each output.
- Five analog inputs (0–15V), which can also be used as virtual digital inputs with programmable thresholds.
- Analog inputs are selectable for resistive sensors (0–5 k Ω).
- One quadrature encoder input.
- Serial port for Curtis programmer or fault code display.
- CANopen communication port controlled by dynamic mapping.
- Regulated 5V and unregulated 12V current-limited power supplies.
- The output voltage and current of the 5V and 12V supplies can be monitored.
- Software and hardware watchdog circuits ensure proper software operation.
- IP65-rated protection for 1356P (exclusive of connectors).
- Red and yellow status LEDs provide external monitoring.

DESCRIPTIONS OF KEY FEATURES

Active-High Digital Inputs

The 1356/1356P has eleven digital inputs. Each input is digitally filtered to eliminate switch “bounce” or noise in the signal. A power resistor pull-down to B- at each input provides active-high to B+.

High-Frequency Driver Outputs

The 1356/1356P contains two driver outputs. One can sink up to 1 amp through an inductive or a resistive load; the other can sink up to 3 amps through an inductive or a resistive load. Internal flyback diodes to B+ prevent voltage spikes. High-Frequency PWM (16 kHz) provides a smooth current to the load.

Constant Current or Voltage Outputs

The two driver outputs can work in Constant Current mode or Constant Voltage mode.

In Constant Current mode, the software runs a closed-loop PI controller to provide an average constant current. This current is commanded over PDO as a 0–100% command based on the maximum current setting (set through a Curtis programmer or an SDO).

Each output can also be programmed for Constant Voltage mode. In this mode, the battery voltage is monitored, and the PWM command is corrected by a feed-forward controller to provide a constant average voltage commanded over the PDO (a 0–100% command based on the maximum voltage setting).

In addition, each output can also be programmed to provide a directly commanded PWM% output (Direct PWM mode) or shut off to be used as an input (Active-High Digital Input Only mode).

Programmable Dither for Hydraulic Valves

Dither is a small variation in the command that keeps the seals of a proportional valve oiled. This lubrication allows the valve to move freely for accurate PV control. Dither is only active on drivers in Constant Current mode.

Voltage Analog Inputs

The 1356/1356P has five analog inputs scaled to read 0–15 volts. The analog channels are read by a 12-bit ADC, resulting in about 3.66 millivolt resolution. Independently adjustable filters ensure a smooth signal.

Resistive Sensor Inputs

Each analog input can be used with resistive sensors, such as RTDs (Resistive Temperature Devices).

Virtual Digital Inputs

The five analog inputs are also sensed and decoded as digital inputs. A unique feature of these digital inputs is that the active high/low thresholds are completely programmable. Thus, these inputs can be used with analog sensors to detect conditions like over/under pressure, high/low-level points, etc.

Encoder Interface

The 1356/1356P has one quadrature encoder input, which shares with the Analog 4–5 pins. The 1356/1356P can detect an open fault on the encoder input wire.

CAN Interface

The 1356/1356P is CANopen compliant, responding to the standard NMT, PDO, and SDO communications and the DS301-required identity and standard objects. The Curtis CANopen extensions allow additional features, such as OEM and User default configurations and time-stamped fault logging.

PDO Dynamic Mapping

The 1356/1356P can receive two PDOs and respond with two PDOs. These PDOs use dynamic mapping. All programmable parameters and viewable values within the 1356/1356P are accessible by SDOs or with a Curtis programmer.

Online Update

The 1356/1356P has can to update its software through the serial port (with Curtis 1309USB) or the CANopen interface (with Peak-CAN tools) using existing Curtis PC software tools.

Status LEDs

The 1356 has two fault LEDs (red and yellow) to clearly flash the fault code. The 1356 and the 1356P can drive a single remote LED via the serial port to flash the fault code.

Familiarity with your Curtis 1356/1356P module will help you install and operate it properly. We encourage you to read this manual carefully. If you have questions, please contact the Curtis office nearest you.

2 — INSTALLATION AND WIRING

MOUNTING THE MODULE

The outline and mounting hole dimensions for the modules are shown in Figure 2-1.


The 1356P module should be mounted using two M4 screws.

The 1356 module requires the OEM to develop an appropriate case to provide environmental protection. Mounting for the 1356 depends on the case.

⚠ CAUTION

Care should be taken to prevent contaminating the PCBA (1356) or connector (1356P). In order to prevent external corrosion and leakage paths from developing, the mounting location should be carefully chosen to keep the module as clean and dry as possible.

Figure 2-1
Mounting dimensions,
Curtis 1356 and
1356P expansion
modules.

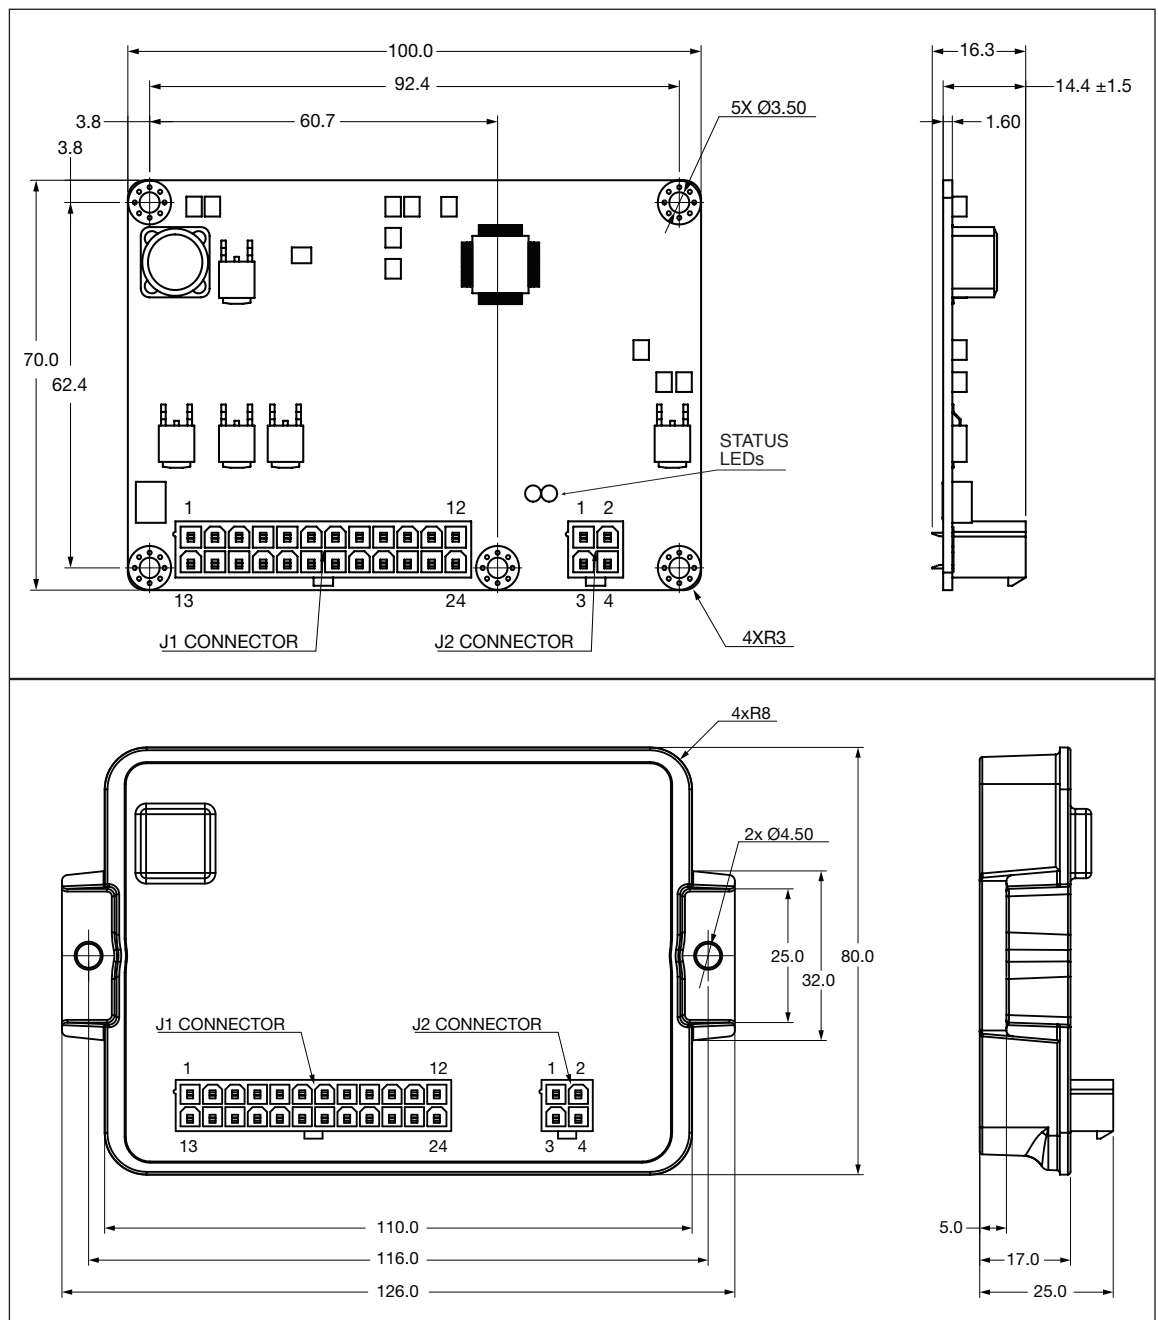

If the outputs will be used at or near their maximum ratings, it is recommended that the module be mounted to a good heatsinking surface, such as an aluminum plate.



You will need to take steps during the design and development of your end product to ensure that its EMC performance complies with applicable regulations; suggestions are presented in Appendix A.

The 1356/1356P contains **ESD-sensitive components**. Use appropriate precautions in connecting, disconnecting, and handling the module. See installation suggestions in Appendix A for protecting the module from ESD damage.

⚠ CAUTION

Working on electrical systems is potentially dangerous. You should protect yourself against uncontrolled operation, high current arcs, and outgassing from lead acid batteries:

UNCONTROLLED OPERATION – Some conditions could cause the motor to run out of control. Disconnect the motor or jack up the vehicle and get the drive wheels off the ground before attempting any work on the motor control circuitry.

HIGH CURRENT ARCS – Batteries can supply very high power, and arcing can occur if they are short circuited. Always open the battery circuit before working on the motor control circuit. Wear safety glasses, and use properly insulated tools to prevent shorts.

LEAD ACID BATTERIES – Charging or discharging generates hydrogen gas, which can build up in and around the batteries. Follow the battery manufacturer's safety recommendations. Wear safety glasses.

CONNECTIONS

The 1356/1356P connections are made through 24-pin and 4-pin Molex connectors. The mating plugs are Molex #39-01-2245 and #39-01-2045, and the contact pins are #39-00-0059.

The individual pins are characterized in Tables 2-1 and 2-2.

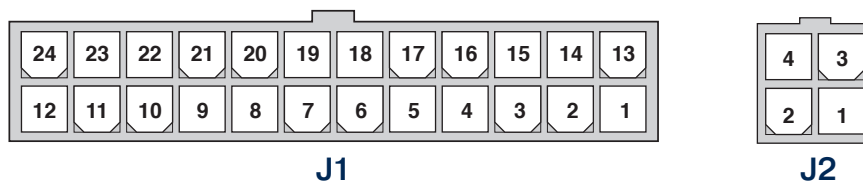


Table 2-1 24-Pin Molex Connector Pin Assignment

PIN	NAME	DESCRIPTION
J1-1	B+	Battery positive.
J1-2	Input/Output 1	Active High Digital Input 1 & High Power PWM Active Low Output 1.
J1-3	Input 3	Active High Digital Input 3.
J1-4	Input 5	Active High Digital Input 5.
J1-5	Input 7	Active High Digital Input 7.
J1-6	Input 9	Active High Digital Input 9.
J1-7	Input 11	Active High Digital Input 11.
J1-8	Input 13	Active High Digital Input 13.
J1-9	Analog Input 2	Voltage or Resistive Input 2.
J1-10	Analog Input 4/Encoder A	Voltage or Resistive Input 4 & Quadrature Encoder Input Phase A.
J1-11	CAN H	CAN Bus High Communication Line.
J1-12	+5V	Regulated Low Power +5V Output.
J1-13	B-	Battery negative.
J1-14	Input/Output 2	Active High Digital Input 2 & High Power PWM Active Low Output 2.
J1-15	Input 4	Active High Digital Input 4.
J1-16	Input 6	Active High Digital Input 6.
J1-17	Input 8	Active High Digital Input 8.
J1-18	Input 10	Active High Digital Input 10.
J1-19	Input 12	Active High Digital Input 12.
J1-20	Analog Input 1	Voltage or Resistive Input 1.
J1-21	Analog Input 3	Voltage or Resistive Input 3.
J1-22	Analog Input 5/Encoder B	Voltage or Resistive Input 5 & Quadrature Encoder Input Phase B.
J1-23	CAN L	CAN Bus Low Communication Line.
J1-24	I/O GND	Input and Output Ground Reference.

Table 2-2 4-Pin Molex Connector Pin Assignment

PIN	NAME	DESCRIPTION
J2-1	Serial Rx / LED Enable	Serial Receive / Status LED Enable.
J2-2	I/O GND	Input and Output Ground Reference.
J2-3	Serial Tx / LED Output	Serial Transmit / Status LED Output.
J2-4	+12V	Unregulated Low Power +12V Output.

WIRING RECOMMENDATIONS

Power (Pins J1-1 and J1-13)

The B+ and B- cables should be run close to each other between the module and the battery. For best noise immunity, the cables should not run across the center section of the module. The wire gauge must be sufficient to carry the continuous and maximum loads seen at each pin to prevent overheating these pins.

Driver outputs (Pins J1-2 and J1-14)

The driver outputs produce high-frequency (16 kHz) pulse waves that can radiate RFI noise. The wire from the module to the load should be kept short and routed with the return wire back to the module.

CAN bus (Pins J1-11 and J1-23)

It is recommended that the CAN wires be run as a twisted pair. However, many successful applications at 125 kbit/s are run without twisting, using two lines bundled in with the rest of the low-current wiring. CAN wiring should be kept away from the high-current cables and crossed at right angles when necessary. If the 1356/1356P is at the end of the CAN bus, the bus needs to be terminated by externally wiring a 120Ω ½W resistor across CAN High and CAN Low (for those models that do not have a 120Ω terminal resistor between CAN H and CAN L).

All other low current wirings

The remaining low-current wiring should be run according to standard practices. Running low-current wiring next to the high-current wiring should always be avoided.

WIRING: BASIC CONFIGURATION

A basic wiring diagram is shown in Figure 2-2 and described below. The diagram shows the standard power and battery connections, as well as some basic uses for the inputs and outputs.

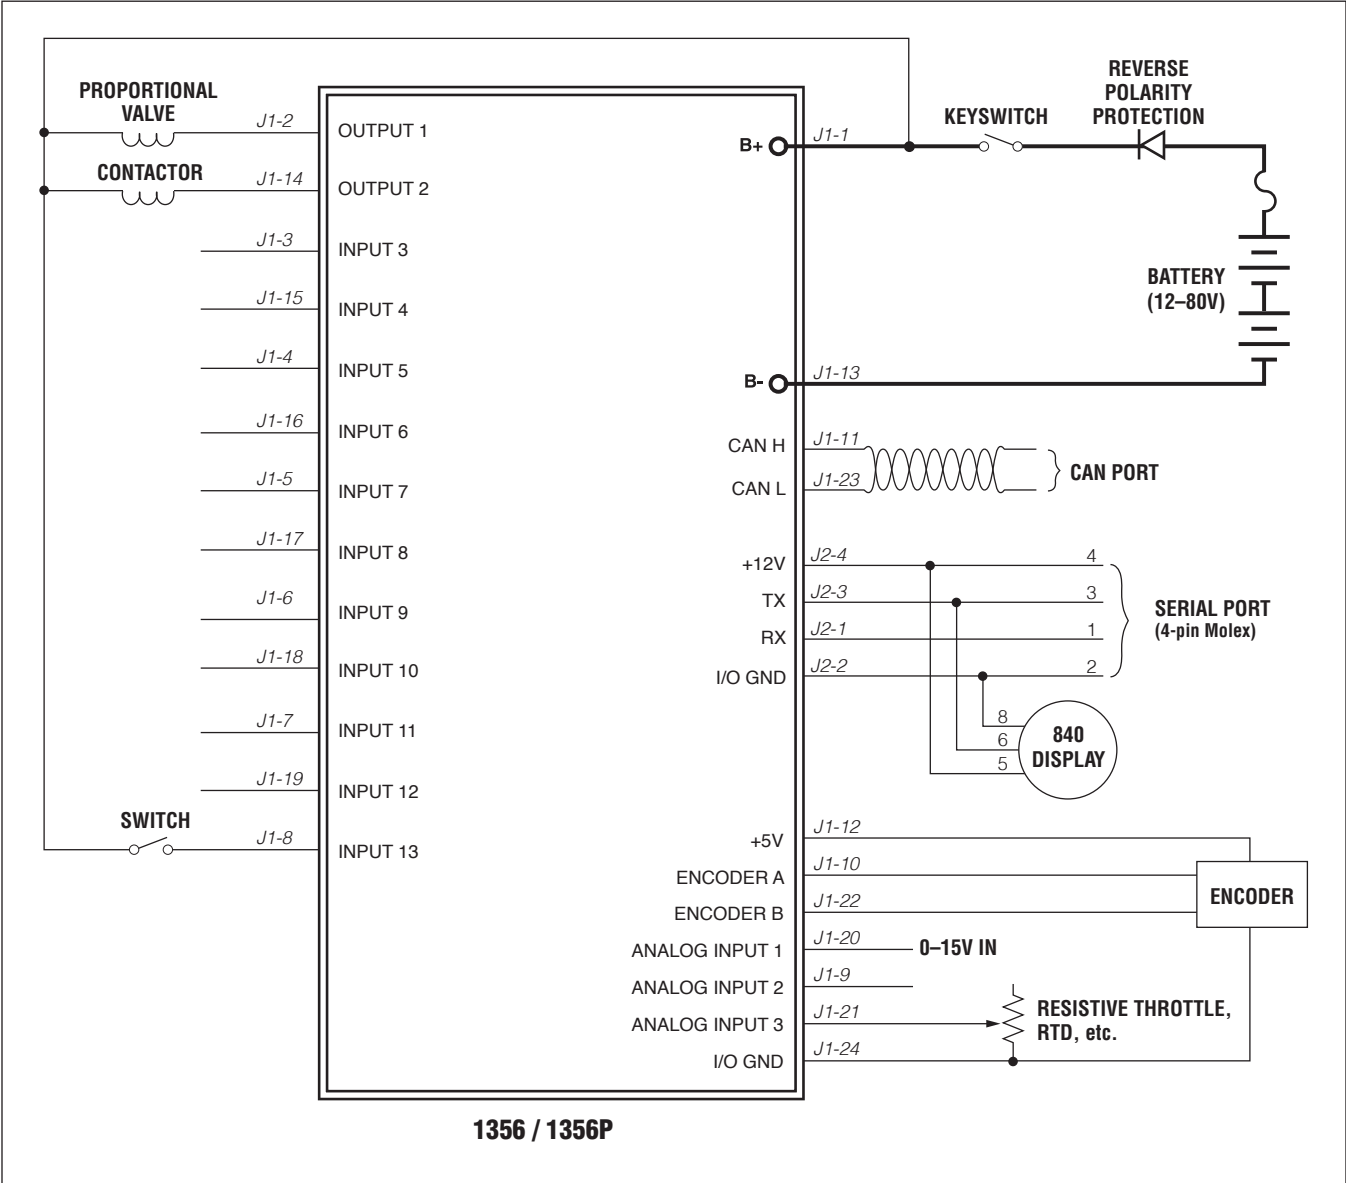


Figure 2-2
Basic wiring diagram, Curtis 1356 /1356P CAN expansion module.

Power Connection

The battery is connected to the module's B+ pin through a fuse, a diode, and a key switch. The fuse protects the wiring in the event of a short or failure. The return path of the coils is also brought back to the B+ pin to utilize the flyback diodes connected inside the module between B+ and each driver output.

The key switch is used to turn on the system. When the key switch is closed, B+ goes high, and the 1356/1356P's power supply brings up the module.

Driver Outputs

Each of the two driver outputs (Output 1, 2) is can drive a closed-loop current-controlled proportional valve or a voltage-controlled contactor. Each driver has an independent mode, max, and dither settings.

These are high-power drivers. The internal impedance to the ground will cause leakage current to flow through the output even when the output driver is off. This leakage current can be enough (>2 mA) to light high-efficiency LEDs.

In the wiring diagram, the output at J1-2 is shown driving a proportional valve coil. This driver is programmed for Constant Current mode and would have some Dither applied.

The second output, at J1-12, is driving a basic contactor coil. This output is in the Constant Voltage mode and can be set to run at a lower voltage than the nominal battery voltage.

Switch Inputs

All the inputs are Active High inputs ("On" when connected to B+). In the wiring diagram, Input 13 (J1-8) is shown as an Active High input switching to B+.

(Note that when Input/Output 1 or 2 is used as a switch input, its Operation Mode must be set to 0; see [pages 33](#) and [45](#).)

Analog Inputs

Analog Input 3, at J1-21, is shown being used with an RTD. This requires setting Analog Input 3's Input Type parameter to 1 = Resistive input (see [pages 34](#) and [44](#)).

CAN Bus

The 1356/1356P has an internal 1 k Ω bus termination resistor. This internal impedance matches the system requirements for a mid-line or short stub connection. The 1356/1356P can communicate up to 1 Mbit/s on a properly terminated/wired bus.

WIRING: APPLICATION EXAMPLE

The wiring diagram in Figure 2-3 provides an example of a fingertip joystick application for an electric forklift.

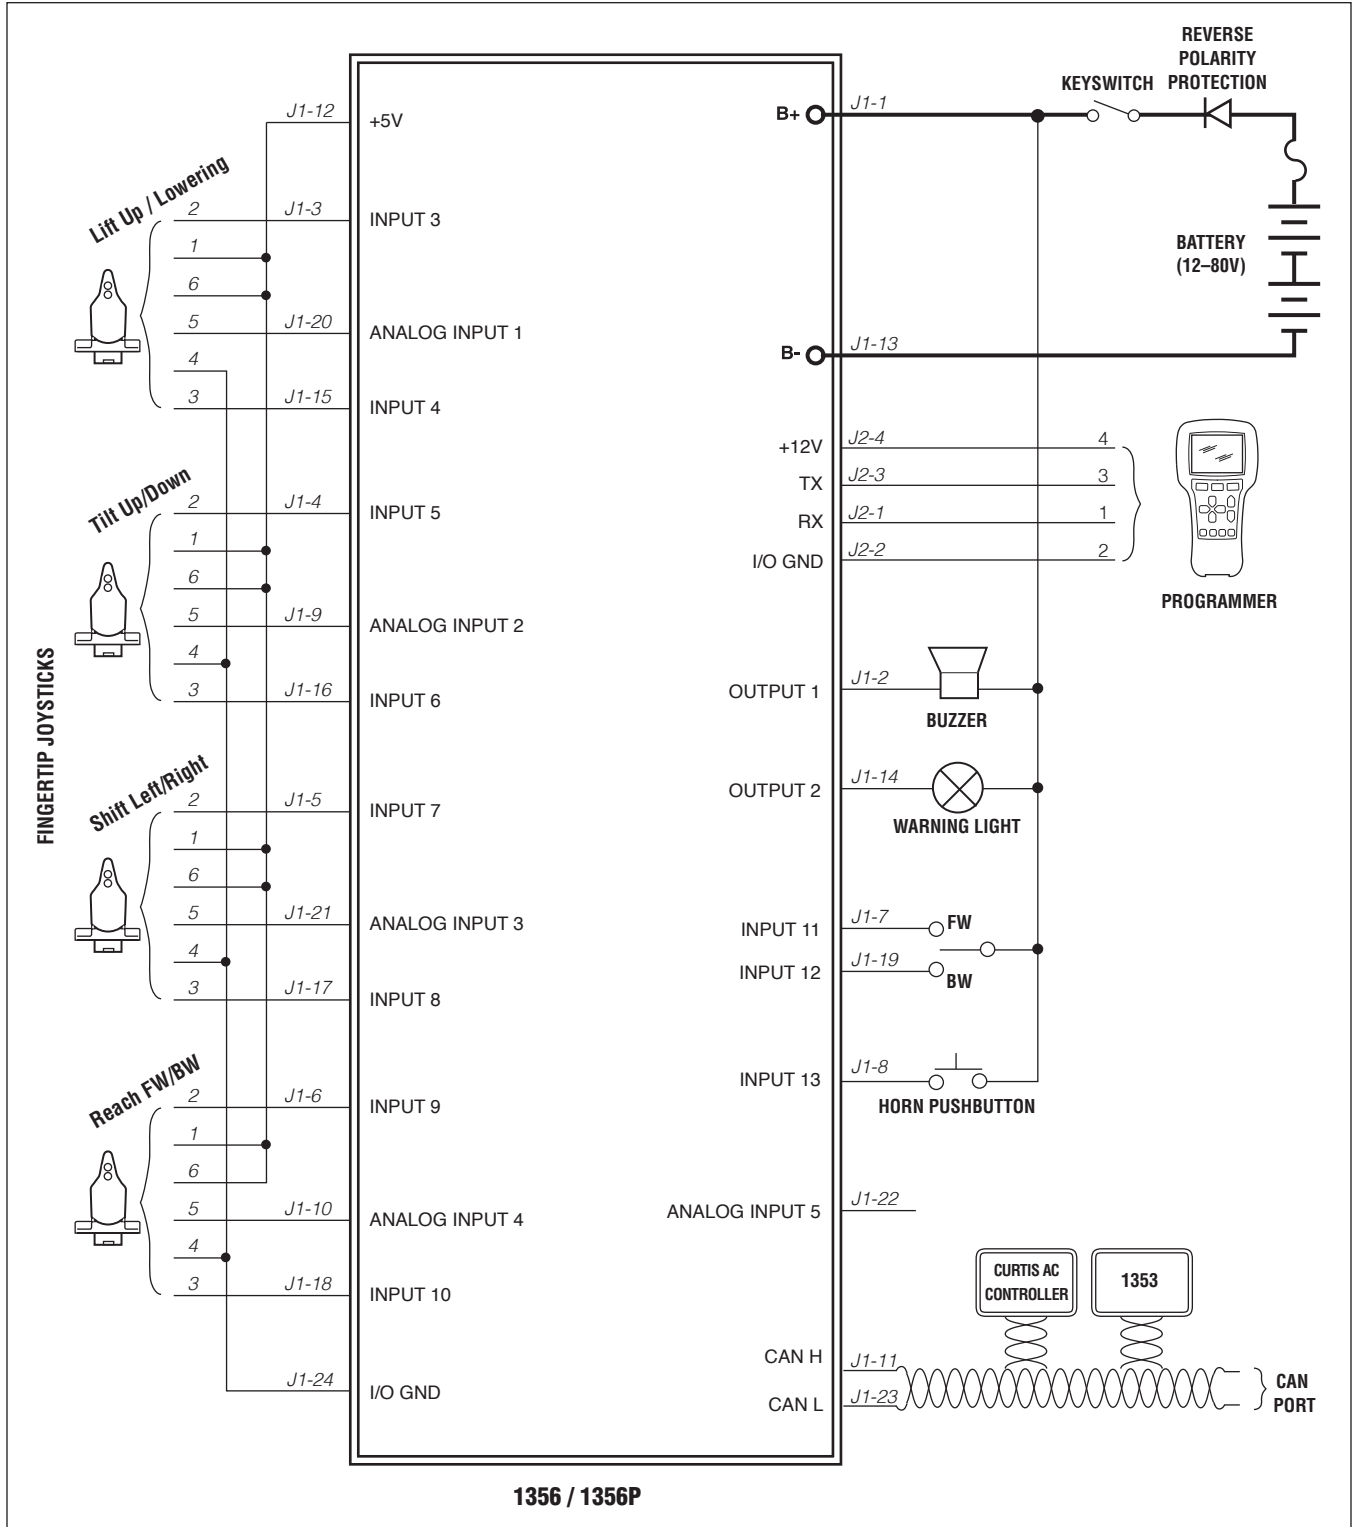


Figure 2-3

Application example, Curtis 1356 /1356P CAN expansion module.

INPUT/OUTPUT SIGNAL SPECIFICATIONS

The input/output signals wired to the 24-pin connector can be grouped by type as follows; their electrical characteristics are discussed below.

- Digital inputs.
- Driver outputs.
- Analog inputs with virtual digital input.
- Encoder inputs.
- Serial port.
- CAN Bus interface.
- Auxiliary power supplies.



Digital Inputs

The 1356/1356P has eleven digital inputs. In addition, the two driver outputs (Input/Output 1 and Input/Output 2) can be programmed as digital inputs (as long as the drivers are off: i.e., no current, voltage, or PWM output). Each of these digital inputs has a pull-down resistor to B-. It provides an active high input (“On” when connected to B+). The side effect of this pull-down resistor is that there is a small leakage current in the two driver outputs when the output driver is Off. This leakage can be enough (>2 mA) to light high-efficiency LEDs.

DIGITAL INPUT SPECIFICATIONS

SIGNAL NAME	PIN	LOGIC THRESHOLD	INPUT IMPEDANCE
Input/Output 1	J1-2	<i>All models:</i> Low = 1.6 V High = 4.0 V	<i>12–36V models:</i> about 10 kΩ <i>36–80V models:</i> about 47 kΩ
Input/Output 2	J1-14		
Input 3	J1-3		
Input 4	J1-15		
Input 5	J1-4		
Input 6	J1-16		
Input 7	J1-5		
Input 8	J1-17		
Input 9	J1-6		
Input 10	J1-18		
Input 11	J1-7		

Because Input/Output 1 and Input/Output 2 can also be used as driver outputs, it is important to ensure that Operation Mode is set appropriately. When they are used as digital inputs, the Operation Mode parameter must be set to 0 = Active High Digital Input (see [pages 33 and 45](#)). Otherwise, a direct short from the battery through the internal driver FET will occur when the input is switched high, and the FET is turned on.



Driver Outputs

The 1356/1356P contains two driver outputs. These outputs have all the features necessary to drive proportional valves and many other inductive and non-inductive loads. A variable amount of dither (fixed frequency command “jitter”) can be added to the PWM to prevent proportional valves from sticking in place.

DIGITAL OUTPUT SPECIFICATIONS

SIGNAL NAME	PIN	MAX CURRENT	IMPEDANCE	FREQUENCY
Input/Output 1	J1-2	3 A	<i>12–36V models:</i> 10 kΩ pulldown to B– <i>36–80V models:</i> 47 kΩ pulldown to B–	<i>All models:</i> 16 kHz 0–100% duty cycle
Input/Output 2	J1-14	1 A		

The drivers can be set for Constant Current, Constant Voltage, or Direct PWM control mode.


In *Constant Current* mode, the driver command of 0 to 100% is interpreted as a current from 0 to the Max Output setting. Internal current shunts are measured and fed to a closed-loop PI controller to provide a steady current over changing loads and supply voltages.

In *Constant Voltage* mode, the driver command of 0 to 100% is interpreted as a voltage from 0 to Max Output. The battery voltage is constantly monitored and fed back to a closed-loop PI controller to provide a steady voltage, compensating for battery droop and discharge. If the command is higher than the driver can output, the PWM will max out at 100%.

In *Direct PWM* mode, the driver command of 0 to 100% is directly output on the driver.

Each driver is monitored and will detect a short in the load, a failed internal driver FET, and/or an open in the load wiring. At near 0% and 100% PWM, it is not possible to discern each fault, and some faults will not be detected.

If the driver outputs are connected to inductive loads, the coil should have a return line to the B+ pin of the 1356/1356P. This connection provides a path for the internal freewheel diodes to clamp the turn-off spike. Failure to make this connection with inductive loads can cause permanent damage to the 1356/1356P and propagate failures of other electronics in the system due to the high voltage spike caused when an inductive load turns off without a freewheeling path.



Analog Inputs


The 1356/1356P has five 0 – 15 V analog inputs. These inputs are scaled down by 5.76, clamped to 3.3 V, and read by a 12-bit ADC internal to the MCU.

ANALOG INPUT SPECIFICATIONS

SIGNAL NAME	PIN	VOLTAGE	INPUT IMPEDANCE	PROTECTED VOLTAGE RANGE
Analog Input 1	J1-20	<i>Nominal input voltage: 0 – 15 V</i> <i>Input maximum reverse voltage: –1.7 V</i>	<i>Voltage Input Type:</i> about 21 kΩ <i>Resistance Input Type:</i> about 1 kΩ	–1 V to B+
Analog Input 2	J1-9			
Analog Input 3	J1-21			
Analog Input 4	J1-10			
Analog Input 5	J1-22			

The maximum resistive input on each analog input is 7.5 kΩ. The resistive or voltage type of analog input can be selected by a Curtis programmer (1313/1314) or CAN SDO message.

These five analog inputs can also be used as digital inputs. A unique feature of these digital inputs is that the active high/low thresholds are completely programmable. Thus, these inputs can be used with analog sensors to detect conditions like over/under pressure, high/low-level points, etc.



Encoder Inputs

Analog Inputs 4 and 5 can be configured as a quadrature encoder input (Encoders A and B). This standard quadrature encoder input accepts open collector encoders with pull-up resistors in the 1356/1356P module. The encoder can be powered from the +5V supply (J1-12) or the +12V supply (J2-4) while using the I/O GND (J1-24) as a common.

ENCODER INPUT SPECIFICATIONS

ENCODER PHASE	PIN	Vth LO	Vth HI	FREQUENCY MAX	INPUT IMPEDANCE	PROTECTED VOLTAGE RANGE
A	J1-10	1.0 V	2.2 V	15 kHz	1 kΩ (internal pull-up to +4.4 V)	–1 V to B+
B	J1-22					



Serial Port

The Curtis 1313/1314 programmer or the Curtis Model 840 can be connected to the 1356/1356P's serial port, J2.



SERIAL PORT SPECIFICATIONS

SIGNAL NAME	PIN	SUPPORTED PROTOCOL/DEVICES	DATA RATE	PROTECTED VOLTAGE RANGE
TX	J2-3	1313 Handheld Programmer, 1314 PC Programming Station, Curtis 840 Display	As required, 9.6 to 56 kbit/s	-0.3 V to 12 V
RX	J2-1			

Power is provided through J2-4 (+12V), and J2-2 provides the I/O ground reference.

When the 840 is connected to the serial port, it will alternately show BDI, hour meter, and fault information.

The serial port can also be used as an external Status LED fault code display. When the serial port is used for fault code display, a jumper must be added between J2-1 and J2-4, and an LED is connected between J2-2 and J2-3.




CAN Bus Interface

The CAN bus interface will comply with CAN2.0B, active from 50 kbit/s to 1Mbit/s communication rate.

The 1356/1356P will be terminated by an internal 1 kΩ resistor across the CAN High and Low communication pins. This internal resistor assumes a mid-truck connection (not end-of-line).

If a 1356/1356P without terminal resistance (models ending in -4101 or -6101) is at the end of the CAN bus, the bus needs to be terminated by externally wiring a 120 Ω, ½ W resistor across CAN High and CAN Low.



Auxiliary Power Supplies

The 1356/1356P provides +12V and +5V auxiliary output power for low-power circuits such as fingertip joysticks, electronic throttle, Curtis programmer, Curtis 840 display, or remote I/O boards. The return line for these low-power circuits is I/O GND. The maximum total combined output current is 200 mA.



AUXILIARY POWER SUPPLY SPECIFICATIONS

SIGNAL NAME	PIN	V _{OUT}	V _{OUT} TOLERANCE	I _{OUT} (MAX)	RIPPLE/NOISE
+12V	J2-4	12 V	10 %	100 mA	2 %
+5V	J1-12	5 V	5 %	100 mA	2 %



Power

The power pins are each capable of carrying up to 9 A. Every application must use B+ (J1-1) and B- (J1-13).

3 — CANopen COMMUNICATIONS


The 1356/1356P adheres to the industry standard CANopen communication protocol and thus will easily connect to many CAN systems, including those using the Curtis AC and Vehicle System controllers. Any CANopen-compatible manager can be programmed to control the 1356/1356P.

The 1356/1356P receives two incoming RX PDOs and responds with two outgoing TX PDOs. Dynamic mapping is available for the PDOs. All programmable parameters and monitor parameters are accessible by standard SDO transfer.

The time between incoming PDOs is monitored and, if excessive, will flag a fault. This monitoring allows the 1356/1356P to know that the system is still under manager control. The 1356/1356P also produces Heartbeat and Error messages, the CiA-preferred safety and security method.

MINIMUM STATE MACHINE

The 1356/1356P will run the CANopen minimum state machine as defined by CiA. The CANopen minimum state machine has four defined states: Initialization, Pre-Operational, Operational, and Stopped.

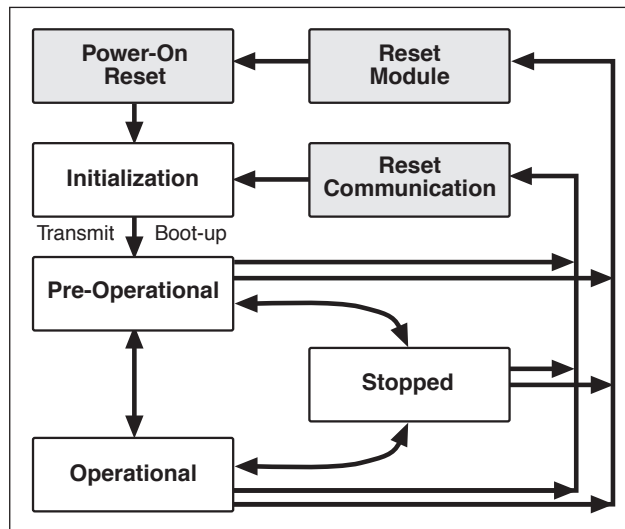

When the 1356/1356P powers up, it goes to the Initialization state; also known as the Boot-up state. No CAN communications from the 1356/1356P are transmitted in this state, although the 1356/1356P listens to the CAN bus. When the 1356/1356P has completed its startup and self-tests, it issues an initialization heartbeat message and automatically goes to the Pre-Operational state.

In the Pre-Operational state, the 1356/1356P can receive and respond to SDOs, and NMT commands and will send its heartbeat. It will not receive or send PDOs (unless PDO-TX cyclic transmitting is enabled). After receiving an Operational State NMT command, the 1356/1356P will enter the Operational state (full normal operation).

In the Operational state, the 1356/1356P will start receiving and responding to PDOs and process all necessary CANopen messages.

Baud Rates

The 1356/1356P runs at one of the seven selectable baud rates: 50 kbit/s, 100 kbit/s, 125 kbit/s, 250 kbit/s, 500 kbit/s, 800 kbit/s, or 1 Mbit/s. The baud rate can be changed by a Curtis programmer or by an SDO. Changes in the baud rate require an NMT reset or KSI cycle.

CAN Node ID

The 1356/1356P CAN node ID can be assigned from 1 to 127. It can be changed by a Curtis programmer or by CAN SDO. The default CAN node ID for the 1356/1356P is 19. The CAN node ID is used by CANopen to route messages *to* the 1356/1356P and to denote messages *from* the 1356/1356P. The node ID is part of the COB-ID and plays a part in message priority and bus arbitration. Changes to the node ID require an NMT reset or KSI cycle.

Standard Message Identifiers


The standard message types are defined within a 4-bit field in the COB ID (Communication Object Identification). Consequently, there are 16 possible standard message types. The values for Curtis products are:

Generic Type	Message Identifier	Value (binary – hex)
NMT	NMT	0000 – 0x0
EMERGENCY	SYNC_ERR	0001 – 0x1
PDO	PDO1_TX	0011 – 0x3
	PDO1_RX	0100 – 0x4
	PDO2_TX	0101 – 0x5
	PDO2_RX	0110 – 0x6
SDO	SDO-TX	1011 – 0xB
	SDO_RX	1100 – 0xC
HEARTBEAT	NODE	1110 – 0xE

These types and values comply with the CANopen spec and are used to invoke standard transfer or information across the CAN bus.

Identifiers built using standard message types consist of three fields. The four upper bits hold the message type. The Node ID is in the bottom 7 bits.

Below is the CANopen-compliant Curtis standard organization of the COB-ID.



NMT messages have the highest priority of the standard message types, and the heartbeat has the lowest priority.

NMT MESSAGES

NMT (Network Management Transmission) messages are the highest priority message available. The NMT message puts the 1356/1356P into a specific Device State, as shown below. These messages have 2 bytes of data sent by the manager; the ancillary does not respond with any data to an NMT.

The Device State value can be queried over the CAN bus using an SDO. The Device State value is also transmitted with each heartbeat message.

Value	Device State
0	Initialization (or “boot-up”)
4	Stopped
5	Operational
127	Pre-Operational

The NMT message identifier consists of the standard message type, NMT, in the top four bits. The bottom seven bits must be set to zero.

The first data byte of the NMT command is the command specifier. The 1356/1356P will respond to the following commands.

Value	Command Specifier
0x01	Enter the Operational state
0x02	Enter the Stopped state
0x80	Enter the Pre-Operational state
0x81	Reset the 1356/1356P (warm boot)
0x82	Reset the CAN bus

The second byte of the NMT command defines whether this NMT is for all ancillary devices on the bus (data byte = 0x00) or for a specific node (data byte = Node ID of the 1356/1356P).

EMERGENCY MESSAGES

Emergency messages are the second highest priority in CANopen and the highest priority that an ancillary (like the 1356/1356P) can transmit. To minimize the number of times Emergency messages can be set, a minimum time between messages can be programmed using a Curtis programmer or an SDO.


Data bytes 1 and 2 define the error category.

Data byte 3 is the CANopen-required error register. Curtis products define this as 0x01 if there is a fault present and 0x00 when all faults are clear.

Data bytes 4 through 8 define the specific fault. The 1356/1356P will place the current 24-bit hour meter into data bytes 4 through 6.

Bytes 7 and 8 are not used by the 1356/1356P and are always 0x0000.

The emergency message format indicating an error is shown below.

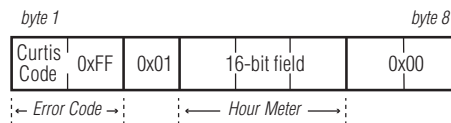

HEARTBEAT

The Heartbeat message is a very low-priority message, periodically sent by each ancillary device on the bus. The Heartbeat message requires no response. Once the 1356/1356P is in the Pre-Operational state, the Heartbeat message will be continually issued until communication is stopped.

The Heartbeat message has only one data byte. The top bit is reserved and should be set to zero. The bottom 7 bits hold the current NMT device state.

4 — PDO COMMUNICATIONS

The PDO (**P**rocess **D**ata **O**bject) communication packets conserve bus bandwidth by bundling the values of a group of objects into a single message. The 1356/1356P is controlled and monitored through four PDOs. PDO messages have a medium priority, and each PDO always carries 8 bytes of data. The content of these PDOs can be dynamic mapped as Curtis AC motor controllers. For PDO dynamic mapping information, please refer to Curtis document *Generic CANopen Implementation*.

A PDO transfers 8 bytes of data across the CAN bus. Any given byte is mapped to a single byte of a pre defined CAN Object. Mapping can be done statically as part of the system design, or it can be done “dynamically” by using SDO transfers. Dynamic mapping is implemented on the 1356/1356P, as described in Section 5: SDO Communications.

PDO-TX (TPDO) messages can be transmitted either in Cyclic Transmission mode or standard Manager/Ancillary mode.

The **Cyclic Transmission mode** allows the 1356/1356P to periodically transmit the PDO-RX (RPDO) at the programmed cycle rate. The cycle rates are adjustable via two parameters: TPDO1 Cycle Rate (for PDO1-TX) and TPDO2 Cycle Rate (for PDO2-TX). If the rate is set to 0, the Cyclic Transmission mode will be disabled, and only the standard Manager/Ancillary mode will be available.

In **standard Manager/Ancillary mode**, the 1356/1356P requires the PDO-RX to be cyclic from the manager. The cycle time must be less than the programmed PDO Timeout. If the PDO-RX is not received within the programmed time, the 1356/1356P will flag a PDO Timeout fault and disable all output drivers. If the PDO Timeout parameter is set to 0, the PDO Timeout fault is disabled, and the 1356/1356P will respond to any PDO incoming at any rate without faulting.

The following tables describe the PDOs exchanged with default mapping.

PDO1-RX (received from the system manager)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Output 1 Command	Output 2 Command	BDI (0–100%)	[Reserved]	[Reserved]	[Reserved]	[Reserved]	[Reserved]

PDO2-RX (received from the system manager)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
[Reserved]	[Reserved]	[Reserved]	[Reserved]	[Reserved]	[Reserved]	[Reserved]	[Reserved]

Transmit PDOs (TPDOs) are messages that can be transmitted (sent) by the device (e.g., ancillary).

Receive PDOs (RPDOs) are definitions of messages that can be received (taken-in) by the device (e.g., manager).

PDO1-TX (sent in response to the system manager)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Input 1–8 Status	Input 9–13 Status	5 Virtual Inputs	[Reserved] (0)	Analog Input 4 Voltage Value Low Byte	Analog Input 4 Voltage Value High Byte	Analog Input 5 Voltage Value Low Byte	Analog Input 5 Voltage Value High Byte

PDO2-TX (sent in response to the system manager)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Analog Input 1 Voltage Value Low Byte	Analog Input 1 Voltage Value High Byte	Analog Input 2 Voltage Value Low Byte	Analog Input 2 Voltage Value High Byte	Analog Input 3 Voltage Value Low Byte	Analog Input 3 Voltage Value High Byte	[Reserved] (0)	[Reserved] (0)

Output Command Bytes

The drivers are closed-loop controlled, either for current or voltage. This byte sets the output command as a percent of the programmed output limit value: 0–255 = 0%–100%.

BDI

The BDI value is a percent of the battery state of discharge: 0–100 = 0–100%; this value is obtained from the CAN manager.

Inputs 1–13 Status Bytes

The 1356/1356P monitors the thirteen digital inputs. The status of these inputs in default PDO-TX mapping is as follows.

PDO1-TX Byte 1

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
Digital Input 8 Status	Digital Input 7 Status	Digital Input 6 Status	Digital Input 5 Status	Digital Input 4 Status	Digital Input 3 Status	Digital Input 2 Status	Digital Input 1 Status

PDO1-TX Byte 2

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
[Reserved] (0)			Digital Input 13 Status	Digital Input 12 Status	Digital Input 11 Status	Digital Input 10 Status	Digital Input 9 Status

A status of 1 (bit set) indicates that the input is active (pulled high to B+). The upper three bits of Byte 2 are unused and set to 0.

Virtual Digital Inputs Byte

Each analog input produces a Virtual Digital Input response. The status of the Virtual Digital Inputs in default PDO-TX mapping is as follows.

PDO1-TX Byte 3

Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0
[Reserved] (0)			Virtual Input 5 Status	Virtual Input 4 Status	Virtual Input 3 Status	Virtual Input 2 Status	Virtual Input 1 Status

If the input is above the programmed High Threshold, the bit will be set to 1. If the input is below the programmed Low Threshold, it will be set to 0. Otherwise, the bit will retain its previous state.

Analog Input High/Low Bytes

The voltage value of the five analog inputs is default mapped in the PDO-TX messages. Each voltage value requires 2 bytes of the PDO packet.

For each analog input, if Resistive Input Type is enabled and the resistance is mapped in PDO-TX messages, the value will be returned as ohms, up to 7.5 kΩ. The value 0xFFFF is interpreted as infinity (wire open).

Encoder Input Bytes

When the Analog Input pair (Analog Input 4&5) is configured as encoder input, the relative PDO bytes will carry the pulse count, RPM value, or position value of the encoder if they are mapped in PDO-TX messages. The encoder input type can be configured as follows.

Pulse Count type

In this type, PDO will output the number of the encoder pulses accumulated. The value is up to $2^{29}-1$ or down to -2^{29} , at which point it will roll back to zero.

RPM type

In this type, PDO will send the RPM value (2 bytes, unit in revolutions per minute).

Position type

In this type, PDO will send the position value (2 bytes, unit in millimeters).

5 — SDO COMMUNICATIONS

CANopen uses Service Data Objects (SDOs) to change and view all internal parameters, or “objects.” The SDO is an 8-byte packet that contains the address and sub-address of the parameter in question, whether to read or write the parameter, and the parameter data (if it is a write command) between the client (e.g., vehicle manager/PC) and server (e.g., ancillary/1356/1356P). SDOs are sent infrequently and have a low priority on the CAN bus.

SDOs are designed for sporadic and occasional use during normal runtime operation. There are two types of SDOs: expedited and block transfer. The 1356/1356P does not support large file uploads or downloads (using the block transfer), so all the SDOs used by the 1356/1356P are expedited SDOs.

The SDOs in the 1356/1356P are used to set up and parameterize the module. They are also used to retrieve basic module information (such as version or manufacture date), review the fault log, and monitor a few key internal variables (mostly for system debug purposes).

As per CANopen:

- The Client device initiates the communications, whether a read, write, upload or download.
- The Sever must respond to the Client request with data and confirm or abort.
- SDO_RX (receive) are sent to the device.
- SDO_TX (transmit) are responses sent by the device.

SDO REQUEST (SDO-RX)

An SDO transfer always starts with a request message from the client (manager device). Each SDO-Rx request message consists of one control byte, a two-byte CAN Object index, a one-byte CAN Object sub-index, and up to 4 bytes of valid data. This format is CANopen compliant.

SDO-RX (*received from the system manager*)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Control	CAN Object Index		Sub-index	Data	Data	Data	Data

The first byte contains R/W message control information.

Action	Byte 1 Value
Read	0x42
Write	0x22

The next two bytes hold the CAN Object index. The LSB of the index appears first, in byte 2, and the MSB appears in byte 3. For example, if the index is 0x3021, byte 2 holds the 0x21 and byte 3 holds the 0x30.

Byte 4 holds the CAN Object sub-index. When there is only one instance of a parameter or value type, this value is 0. If there are several related parameters or values, the sub-index is used.

The last four bytes hold the data to be transferred. In the case of a single-byte transfer, the data is placed into byte 5, with bytes 6 through 8 being undefined (set to 0). In the case of a 16-bit transfer, the lower 8 bits appear in byte 5, and the upper 8 bits appear in byte 6; bytes 7 and 8 are undefined (set to 0). The case of a 32-bit transfer follows the same strategy, with the least significant byte placed in data byte 5 and the most significant byte placed in data byte 8.

SDO 1356/1356P RESPONSE (SDO-TX)

An SDO-Rx request is always acknowledged with a response message from the 1356/1356P. The 1356/1356P can issue two kinds of response messages: a normal response or, in case of an error in the request SDO, an Abort SDO Transfer message.

SDO-TX (sent by 1356/1356P in response to the system manager)

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Control	CAN Object Index		Sub-index	Data: either the requested Read values, the actual Write values, or an error code			

The first byte of the response contains an acknowledge code, which depends on the type of transfer that was initially requested.

Action	Byte 1 Value
Read Response	0x40
Write Acknowledge	0x60
Abort SDO	0x80

Data bytes 2, 3, and 4 hold the CAN Object index and sub-index of the request SDO.

If the SDO is a read command, bytes 5 through 8 will be filled with the requested values, with the LSB in byte 5 and the next least significant in byte 6. All unused bytes are set to 0.

If the SDO is a write command, bytes 5 through 8 will return the **actual** value written in bytes 5–8. In this way, if the 1356/1356P needs to limit or round-down the SDO write request, the manager will know—because the return value will be different than the sent value.

If the SDO-RX did not properly read or tried to access a parameter improperly, an Abort SDO Transfer will be sent. Bytes 5 through 8 will be filled with a 32-bit error code.

0x06020000 = Object does not exist

0x06010002 = Attempt to write to a read-only object

0x06040041 = Object cannot be mapped.

USING AN SDO TO MAP A PDO

The following SDO format shows how to map an SDO to a PDO.

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
Request WR	LSB Index	MSB Index	Sub- Index	LSB Index of Object	MSB Index of Object	Sub-index of Object	Length

Byte 1 contains the request “Write” action, as described earlier.

Bytes 2 through 4 describe the PDO and the byte within the PDO that is to be mapped. Bytes 2 and 3 hold the index indicating the PDO, and Byte 4 holds the sub-index (range 1–8), indicating the PDO byte to be mapped.

Bytes 5 through 8 describe the object to be mapped; in other words; they define the object that has the data that will be transmitted. The object index comes first (least significant byte first), followed by the sub-index, followed by the number of bits to be transferred (must be 8). Note that the sub-index here is used to specify a particular byte within a multi-byte object.

For example, take a 32-bit object. The sub-index should be set to 0 to access the least significant byte of a long word (32 bits). The sub-index should be set to 3 to access the most significant byte of a long word (32 bits).

The SDO commands below show an example of mapping the encoder pulse counts (32-bit, index=0x3190) to PDO1-TX bytes 1–4.

Map the LSB byte to PDO1-TX Byte 1

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
0x22	0x00	0x1A	0x01	0x90	0x31	0x00	0x08

Map the second byte to PDO1-TX Byte 2

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
0x22	0x00	0x1A	0x02	0x90	0x31	0x01	0x08

Map the third byte to PDO1-TX Byte 3

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
0x22	0x00	0x1A	0x03	0x90	0x31	0x02	0x08

Map the MSB byte to PDO1-TX Byte 4

Byte 1	Byte 2	Byte 3	Byte 4	Byte 5	Byte 6	Byte 7	Byte 8
0x22	0x00	0x1A	0x04	0x90	0x31	0x03	0x08

In these SDO commands, bytes 2 and 3 hold the index of PDO1_TX mapping (0x1A00), and the sub-index in byte 4 shows the byte to be mapped. Bytes 5 and 6 hold the object index (0x3190), and the sub-index in byte 7 shows the byte in the 32-bit object to be mapped.

TYPES OF SDO OBJECTS

Three types of SDO objects are described in the following pages: *Communications Profile Objects*, *Programmable Parameter Objects*, and *Monitor Parameter Objects*.

COMMUNICATION PROFILE OBJECTS

The Communication Profile Objects are shown below in Table 5-1.

Table 5-1 Communication Profile Object Dictionary

NAME	ACCESS	INDEX	SUB-INDEX	RANGE CAN VALUE	DESCRIPTION
Device Type	RO	0x1000	0x00	0x00000000	Predefined type of CAN module (I/O).
Error Register	RO	0x1001	0x00	0 or 1	= 0 if there are no errors, = 1 if there is an error,
Manufacturer's Status Register 1	RO	0x1002	0x00	2 bytes	The value of the Status Register. See Table 5-1 for more details.
Fault Log (pre defined error field)	RW	0x1003	0x00	0x10	Length of this object. Clear fault log by writing 0 into this address.
	RO		0x01 – 0x10	4 bytes	Contains an array of 16 fault codes and time stamps as reported by the Emergency Message.
Node ID	RW	0x100B	0x00	0x01 – 0x7F	Node ID of this 1356 /1356P. This object is not part of the CANopen mandatory dictionary. Must cycle power or send an NMT Reset 1356/1356P or NMT Reset CAN for the new ID to take full effect.
Store Parameters	RW	0x1010	0x00	4 bytes	1356/1356P supports the mandatory Save All Parameters sub-index. See Table 5-1b for more details.
Restore Default Parameters	RW	0x1011	0x00	4 bytes	Controls normal, factory, or backup restore. See Table 5-2c for more details.
Emergency COB ID	RO	0x1014	0x00	0x00000080 – 0x000000FF	11-bit Identifier of the Emergency Message. Only the lowest 11 bits are valid. All other bits must be 0.
Emergency Rate	RW	0x1015	0x00	0 – 1000 ms 0 – 1000 in 4ms steps	Sets the minimum time that must elapse before another Emergency Message can be sent by the 1356/1356P. A setting of 0 disables the Emergency Message.
Heartbeat Rate	RW	0x1017	0x00	0 – 1000 ms 0 – 1000 in 4ms steps	Sets the cyclic repetition rate of the Heartbeat Message. A setting of 0 disables the Heartbeat.
Identity Object	RO	0x1018	0x00	0x06	Length of this structure = 6 sub-indexes.
			0x01	0x00004349	Curtis ID, as defined by CiA.
			0x02	0x054C1005 0x054C1006 0x054C17D5 0x054C17D6	Product code: 2 upper bytes = 1356 /1356P, 2 lower bytes = model number, –4101, –4102, –6101, or –6102.
			0x03	4 bytes	Hardware version is in byte 1, Software version is in byte 2, Build number version is in byte 3, Parameter block version is in byte 4.
			0x04	0 – 999999	Serial Number up to 999,999.
			0x05	1 – 99366	Date Code up to 99, Dec 31.
			0x06	A – Z 0x41 – 0x5Ah	ASCII code of the manufacturer's location.

Table 5-1 Communication Profile Object Dictionary , cont'd

NAME	ACCESS	INDEX	SUB-INDEX	RANGE CAN VALUE	DESCRIPTION
Objects describing the PDO Communications and Mapping Parameters (Note: Each of these objects has dynamic mapping except Nominal Voltage.)					
PDO1-RX Parameters	RO	0x1400	0x00	N/A	Number of PDO1-RX communication parameters.
			0x01		COB-ID of PDO1-RX.
PDO2-RX Parameters	RO	0x1401	0x00	N/A	Number of PDO2-RX communication parameters.
			0x01		COB-ID of PDO2-RX.
PDO1-RX Mapping	RO	0x1600	0x00	N/A	Number of mapped application objects in PDO1-RX.
PDO1-RX Mapping 1st	RW	0x1600	0x01	N/A	PDO1-RX mapping for the 1st application object to be mapped. Default mapped to Driver1 command.
PDO1-RX Mapping 2nd	RW	0x1600	0x02	N/A	PDO1-RX mapping for the 2nd application object to be mapped. Default mapped to Driver2 command.
PDO1-RX Mapping 3rd	RW	0x1600	0x03	N/A	PDO1-RX mapping for the 3rd application object to be mapped. Default mapped to BDI.
PDO1-RX Mapping 4th	RW	0x1600	0x04	N/A	PDO1-RX mapping for the 4th application object to be mapped. Not mapped in default.
PDO1-RX Mapping 5th	RW	0x1600	0x05	N/A	PDO1-RX mapping for the 5th application object to be mapped. Not mapped in default.
PDO1-RX Mapping 6th	RW	0x1600	0x06	N/A	PDO1-RX mapping for the 6th application object to be mapped. Not mapped in default.
PDO1-RX Mapping 7th	RW	0x1600	0x07	N/A	PDO1-RX mapping for the 7th application object to be mapped. Not mapped in default.
PDO1-RX Mapping 8th	RW	0x1600	0x08	N/A	PDO1-RX mapping for the 8th application object to be mapped. Not mapped in default.
PDO2-RX Mapping	RO	0x1601	0x00	N/A	Number of mapped application objects in PDO2-RX.
PDO2-RX Mapping 1st	RW	0x1601	0x01	N/A	PDO2-RX mapping for the 1st application object to be mapped. Not mapped in default.
PDO2-RX Mapping 2nd	RW	0x1601	0x02	N/A	PDO2-RX mapping for the 2nd application object to be mapped. Not mapped in default.
PDO2-RX Mapping 3rd	RW	0x1601	0x03	N/A	PDO2-RX mapping for the 3rd application object to be mapped. Not mapped in default.
PDO2-RX Mapping 4th	RW	0x1601	0x04	N/A	PDO2-RX mapping for the 4th application object to be mapped. Not mapped in default.
PDO2-RX Mapping 5th	RW	0x1601	0x05	N/A	PDO2-RX mapping for the 5th application object to be mapped. Not mapped in default.
PDO2-RX Mapping 6th	RW	0x1601	0x06	N/A	PDO2-RX mapping for the 6th application object to be mapped. Not mapped in default.
PDO2-RX Mapping 7th	RW	0x1601	0x07	N/A	PDO2-RX mapping for the 7th application object to be mapped. Not mapped in default.
PDO2-RX Mapping 8th	RW	0x1601	0x08	N/A	PDO2-RX mapping for the 8th application object to be mapped. Not mapped in default.

Table 5-1 Communication Profile Object Dictionary , cont'd

NAME	ACCESS	INDEX	SUB-INDEX	RANGE CAN VALUE	DESCRIPTION
PDO1-TX Parameters	RO	0x1800	0x00	N/A	Number of PDO1-TX communication parameters.
			0x01		COB-ID of PDO1-TX.
TPDO1 Cycle Rate	RW	0x1800	0x05	0 – 1000 ms 0 – 1000	Periodic transmit rate of PDO1-TX (in 4ms steps). Setting it to 0 will disable periodic transmission.
PDO2-TX Parameters	RO	0x1801	0x00	N/A	Number of PDO2-TX communication parameters.
			0x01		COB-ID of PDO2-TX.
TPDO2 Cycle Rate	RW	0x1801	0x05	0 – 1000 ms 0 – 1000	Periodic transmit rate of PDO2-TX (in 4ms steps). Setting it to 0 will disable periodic transmission.
PDO1-TX Mapping	RO	0x1A00	0x00	N/A	Number of mapped application objects in PDO1-TX.
PDO1-TX Mapping 1st	RW	0x1A00	0x01	N/A	PDO1-TX mapping for the 1st application object to be mapped. Default mapped to LSB byte of Switch Input States.
PDO1-TX Mapping 2nd	RW	0x1A00	0x02	N/A	PDO1-TX mapping for the 2nd application object to be mapped. Default mapped to MSB byte of Switch Input States.
PDO1-TX Mapping 3rd	RW	0x1A00	0x03	N/A	PDO1-TX mapping for the 3rd application object to be mapped. Default mapped to LSB byte of Virtual Digital Input States.
PDO1-TX Mapping 4th	RW	0x1A00	0x04	N/A	PDO1-TX mapping for the 4th application object to be mapped. Default mapped to MSB byte of Virtual Digital Input States.
PDO1-TX Mapping 5th	RW	0x1A00	0x05	N/A	PDO1-TX mapping for the 5th application object to be mapped. Default mapped to LSB byte of Analog4 Voltage Value.
PDO1-TX Mapping 6th	RW	0x1A00	0x06	N/A	PDO1-TX mapping for the 6th application object to be mapped. Default mapped to MSB byte of Analog4 Voltage Value.
PDO1-TX Mapping 7th	RW	0x1A00	0x07	N/A	PDO1-TX mapping for the 7th application object to be mapped. Default mapped to LSB byte of Analog5 Voltage Value.
PDO1-TX Mapping 8th	RW	0x1A00	0x08	N/A	PDO1-TX mapping for the 8th application object to be mapped. Default mapped to MSB byte of Analog5 Voltage Value.
PDO2-TX Mapping	RO	0x1A01	0x00	N/A	Number of mapped application objects in PDO2-TX.
PDO2-TX Mapping 1st	RW	0x1A01	0x01	N/A	PDO2-TX mapping for the 1st application object to be mapped. Default mapped to LSB byte of Analog1 Voltage Value.
PDO2-TX Mapping 2nd	RW	0x1A01	0x02	N/A	PDO2-TX mapping for the 2nd application object to be mapped. Default mapped to MSB byte of Analog1 Voltage Value.
PDO2-TX Mapping 3rd	RW	0x1A01	0x03	N/A	PDO2-TX mapping for the 3rd application object to be mapped. Default mapped to LSB byte of Analog2 Voltage Value.

Table 5-1 Communication Profile Object Dictionary , cont'd

NAME	ACCESS	INDEX	SUB-INDEX	RANGE CAN VALUE	DESCRIPTION
PDO2-TX Mapping 4th	RW	0x1A01	0x04	N/A	PDO2-TX mapping for the 4th application object to be mapped. Default mapped to MSB byte of Analog2 Voltage Value.
PDO2-TX Mapping 5th	RW	0x1A01	0x05	N/A	PDO2-TX mapping for the 5th application object to be mapped. Default mapped to LSB byte of Analog3 Voltage Value.
PDO2-TX Mapping 6th	RW	0x1A01	0x06	N/A	PDO2-TX mapping for the 6th application object to be mapped. Default mapped to MSB byte of Analog3 Voltage Value.
PDO2-TX Mapping 7th	RW	0x1A01	0x07	N/A	PDO2-TX mapping for the 7th application object to be mapped. Not mapped in default.
PDO2-TX Mapping 8th	RW	0x1A01	0x08	N/A	PDO2-TX mapping for the 8th application object to be mapped. Not mapped in default.

Table 5-1 Column Definitions

Access: RO = Read Only access; RW = Read/Write access

Index: The CAN address that is used to access this object.

Sub-index: Some objects have several values associated with them.

In these cases, a Sub-index is used to access each part of the object.

Detail on the Manufacturer’s Status Register, Store Parameters, and Restore Parameters objects is presented in Tables 5-1a, 5-1b, and 5-1c.

Manufacturer's Status Register

The Manufacturer's Status Register reflects the present fault flags. Each fault has its own bit in the Status Register. Unlike the LED Status of the Emergency Message, which can only relay the highest priority fault, the 16-bit Status Register will show **all** present faults. See Section 6: Diagnostics and Troubleshooting for descriptions and probable causes of the faults.

Table 5-1a Manufacturer's Status Register

BIT LOCATION	FAULT
LSB: Bit 0	Internal Fault
Bit 1	Flash Fault
Bit 2	5V Supply Fail
Bit 3	12V Supply Fail
Bit 4	External Supply Out of Range
Bit 5	EEPROM Fault
Bit 6	Encoder Fault
Bit 7	Analog Input Fault
Bit 8	Overvoltage
Bit 9	Undervoltage
Bit 10	Driver 1 Fault
Bit 11	Driver 2 Fault
Bit 12	Coil 2 Fault
Bit 13	Coil 2 Fault
Bit 14	PDO Timeout
Bit 15	CAN Bus Fault

Store Parameter Object

The 1356/1356P has three parameter blocks: the Normal parameter block, the Backup parameter block, and the Factory parameter block. An SDO or 1313/1314 programmer Write operation will update the parameter in working RAM. All parameters in working RAM will be saved to the Normal parameter block after the KSI cycle.

The text string “bkup” initiates complete storage of all parameters to the Backup parameter block.

Table 5-1b Store Parameter Object

Function Request	Value	Access	Description
BACK_UP_COMMAND	“bkup” 0x70756B62	WO	Text string that commands all parameters to be saved from working RAM to the backup flash space.

At first glance, the ASCII looks “backward.” This is because CANopen defines that the LSB goes first and MSB is sent last. Therefore “bkup” (which is data bytes 5, 6, 7, and 8) is written as “pukb” when converting it to hex (data bytes in proper descending order). Using the ASCII hex values for each character, we get 0x70 (“p”), 0x75 (“u”), 0x6B (“k”), and 0x62 (“b”) for the final resultant hex 4-byte number of 0x70756B62.

Restore Default Parameters

The Restore Default Parameters Object allows 1356/1356P to restore all flash backed-up SDO objects to their Factory settings (hard-coded in software), Backup settings (stored in Backup parameter block in flash), or Normal (stored in Normal parameter block in flash). This object can also be used to restore (reset) the Hour Meter value.

Writing a special text string to this object will initiate a restore to Factory, Backup, or Normal settings for all SDO objects stored in flash. Once this object is written to, the next KSI cycle will cause the system settings to be loaded from the new desired location and put into the working RAM locations (Shadow RAM).

A Restore the Backup Settings command (“load”) will load the data values from the Backup parameter block, place them in RAM, and overwrite the Normal parameter block with them. Whatever changes were made to the Normal parameter block will be lost. The Restore Default Parameters function should be set to 0x02 (Restore Normal Settings) so that the 1356/1356P will restore from the Normal parameter block on the next reset or power cycle.

Table 5-1c Restore Default Parameters Object

Restore Default Parameters Function	Write String	Data Read Back	Description
Restore Factory Settings	“fact” 0x74636166	0	Restore all parameter values from built-in defaults. These are hard-coded in the software.
Restore the Backup Settings	“load” 0x6461666C	1	Restore all parameter values from the Backup parameter block. “load” is used to comply with CANopen spec DS301.
Restore Normal Settings	“norm” 0x6D72666E	2	Restore all parameter values from the Normal parameter block.
Preset the Hour Meter	“hour” 0x72756668	N/A	Preset the Hour-Meter to the value loaded into the parameter Preset Hour (0x3062).

On reception of the correct string, 1356/1356P will set a Restore flag and confirm the SDO transmission. If a wrong string or unsupported command is written, 1356/1356P will not set the Restore flag and responds with an Abort SDO.

The Hour-Meter has a special function to reset it. Writing the string “hour” to this index will cause 1356/1356P to preset the Hour-Meter to the value saved in the Preset Hour parameter (0x3062). Note that only the hours can be set to a programmed value; the minutes always will be reset to 0.

PARAMETER PROFILE OBJECTS

The Programmable Parameter Profile objects are shown in Table 5-2. All these parameters, except for Nominal Voltage, have dynamic mapping.

Table 5-2 Parameter Profile Object Dictionary

PARAMETER	SDO LOCATION		RANGE CAN VALUE	DESCRIPTION
	INDEX	SUB-INDEX		
Driver1 Mode	0x3000	0x00	0 – 3, 5 – 7 0 – 3, 5 – 7	Driver mode: 0 = Active High Digital Input mode. 1 = Constant Current mode. 2 = Constant Voltage mode. 3 = Direct PWM mode. 5 = Constant Current mode, with open detection. 6 = Constant Voltage mode, with open detection. 7 = Direct PWM mode, with open detection.
Driver2 Mode	0x3001	0x00	See above.	See above.
Driver1 Current Limit	0x3002	0x00	0.00 – 3.00 A 0 – 300	Sets the maximum current output when the PDO command is 100% (255) when operating in Constant Current mode.
Driver2 Current Limit	0x3003	0x00	See above.	See above.
Driver1 PWM Limit	0x3004	0x00	0 – 100.0 % 0 – 1000	Sets the maximum PWM output when the PDO command is 100% (255) when operating in Direct PWM mode.
Driver2 PWM Limit	0x3005	0x00	See above.	See above.
Driver1 Voltage Limit	0x3006	0x00	0.0 – 36.0 V 0 – 360 (36V models) 0.0 – 80.0 V 0 – 800 (80V models)	Sets the maximum voltage output when the PDO command is 100% (255) when operating in Constant Voltage mode.
Driver2 Voltage Limit	0x3007	0x00	See above.	See above.
Driver1 Dither Period	0x3008	0x00	4 – 200 ms 4 – 200	Sets the time between dither pulses for each output (in 2 ms steps). A dither period of 4 – 200 ms provides a frequency range of 250 – 5 Hz. Applicable only in Constant Current mode.
Driver2 Dither Period	0x3009	0x00	See above.	See above.
Driver1 Dither Amount	0x300A	0x00	0 – 500 mA 0 – 500	Sets the amount (+/–) of dither that will be added/subtracted from the command (in 10 mA steps). Applicable only in Constant Current mode.
Driver2 Dither Amount	0x300B	0x00	See above.	See above.
Driver1 Kp	0x300C	0x00	0.1 – 100.0 % 1 – 1000	Sets the proportional gain factor of the PI current controller.
Driver2 Kp	0x300D	0x00	See above.	See above.
Driver1 Ki	0x300E	0x00	0.1 – 100.0 % 1 – 1000	Sets the integral gain factor of the PI current controller.

Table 5-2 Parameter Profile Object Dictionary, cont'd

PARAMETER	SDO LOCATION		RANGE CAN VALUE	DESCRIPTION
	INDEX	SUB-INDEX		
Driver2 Ki	0x300F	0x00	See above.	See above.
Nominal Voltage	0x3010	0x00	12.0V – 36.0V <i>120 – 360</i> 36.0V – 80.0V <i>360 – 800</i>	Sets the nominal battery voltage, which is used in fault detection. 1356 /1356P-4101&-4102: 12 V, 24V, 36V. 1356 /1356P-6101&-6102: 36 V, 48V, 60V, 72V, 80V.
Analog Input Type	0x3011	0x00	0 – 31 <i>0 – 31</i>	Sets the input type on Analog 1 through 5. LSB for Analog 1 and the next for Analog 2, etc. Upper three bits are not used. Bit = 0, voltage input type. Bit = 1, resistive input type.
Analog1 High Threshold	0x3020	0x00	0.0 – 15.0 V <i>0 – 150</i>	Sets the threshold the analog input must go above to set the virtual digital input high.
Analog2 High Threshold	0x3021	0x00	See above.	See above.
Analog3 High Threshold	0x3022	0x00	See above.	See above.
Analog4 High Threshold	0x3023	0x00	See above.	See above.
Analog5 High Threshold	0x3024	0x00	See above.	See above.
Analog1 Low Threshold	0x3030	0x00	0.0 – 15.0 V <i>0 – 150</i>	Sets the threshold the analog input must go below to set the virtual digital input low.
Analog2 Low Threshold	0x3031	0x00	See above.	See above.
Analog3 Low Threshold	0x3032	0x00	See above.	See above.
Analog4 Low Threshold	0x3033	0x00	See above.	See above.
Analog5 Low Threshold	0x3034	0x00	See above.	See above.
Analog1 Filter Gain	0x3040	0x00	128 s – 8 ms <i>1 – 16384</i>	Sets the amount of filtering on the analog inputs. Higher gains provide faster filtering. Filtering affects the analog reading and the virtual digital input responsiveness.
Analog2 Filter Gain	0x3041	0x00	See above.	See above.
Analog3 Filter Gain	0x3042	0x00	See above.	See above.
Analog4 Filter Gain	0x3043	0x00	See above.	See above.
Analog5 Filter Gain	0x3044	0x00	See above.	See above.
Digital1 Debounce Time	0x3050	0x00	8 – 1000 ms <i>8 – 1000</i>	Sets the debounce time of the digital inputs in milliseconds (in 8 ms steps).
Digital2 Debounce Time	0x3051	0x00	See above.	See above.
Digital3 Debounce Time	0x3052	0x00	See above.	See above.
Digital4 Debounce Time	0x3053	0x00	See above.	See above.
Digital5 Debounce Time	0x3054	0x00	See above.	See above.
Digital6 Debounce Time	0x3055	0x00	See above.	See above.
Digital7 Debounce Time	0x3056	0x00	See above.	See above.
Digital8 Debounce Time	0x3057	0x00	See above.	See above.
Digital9 Debounce Time	0x3058	0x00	See above.	See above.

Table 5-2 Parameter Profile Object Dictionary, cont'd

PARAMETER	SDO LOCATION		RANGE CAN VALUE	DESCRIPTION
	INDEX	SUB-INDEX		
Digital10 Debounce Time	0x3059	0x00	See above.	See above.
Digital11 Debounce Time	0x305A	0x00	See above.	See above.
Digital12 Debounce Time	0x305B	0x00	See above.	See above.
Digital13 Debounce Time	0x305C	0x00	See above.	See above.
CAN Baud Rate	0x3060	0x00	-2 – 4 -2 – 4	Sets the CAN baud rate: -2 = 50 kbit/s. -1 = 100 kbit/s. 0 = 125 kbit/s. 1 = 250 kbit/s. 2 = 500 kbit/s. 3 = 800 kbit/s. 4 = 1Mbit/s. Resets to 125 kbit/s when over-range. Must cycle KSI for the new rate to take effect.
PDO Timeout	0x3061	0x00	0 – 1000 ms 0 – 1000	Sets the time interval (in 4 ms steps) within which the PDO RX must be received, or a fault will be flagged. A setting of zero disables the PDO Timeout fault.
Preset Hour Meter	0x3062	0x00	0 – 65535 h 0 – 65535	Writing to this location will change the hours of Hour Meter and reset the minutes to 0.
Encoder Type	0x3070	0x00	0 – 3 0 – 3	Encoder type: 0 = Encoder disabled. 1 = Pulse count type. 2 = RPM type. 3 = Position type. Must cycle KSI for the new setting to take effect.
Encoder Direction	0x3071	0x00	0, 1 0, 1	Sets the positive direction: 0 = Positive direction when phase A is ahead of phase B. 1 = Positive direction when phase B is ahead of phase A.
Pulses Per Meter	0x3072	0x00	0 – 65535 0 – 65535	This parameter should be set according to the pulses per revolution and displacement per revolution of the encoder. $\text{Pulses Per Meter} = \frac{\text{pulses per revolution}}{\text{displacement per revolution (unit m)}}$
Pulse Per Revolution	0x3073	0x00	0 – 65535 0 – 65535	This parameter should be set according to the encoder specification. Must cycle KSI for the new setting to take effect.
Encoder Reset	0x3088	0x00		Writing 1 to this index will immediately set the encoder counter to zero.
Driver1 Command	0x3090	0x00		Driver output command 0 – 255 = 0% – 100% of max output limit in applicable mode. This command is valid only when mapped and implemented by PDO-RX.
Driver2 Command	0x3091	0x00	See above.	See above.
BDI	0x3201	0x00	0 – 100 0 – 100	Displays BDI value (received from the manager) on the model 840.


Driver Proportional Gain/Driver Integral Gain

The 1356/1356P uses a Proportional/Integral (PI) controller to minimize the error between the command and the actual output in Constant Current mode and Constant Voltage mode. The PI controller works with two parameters, proportional gain (K_p) and integral gain (K_i). Normally, the default settings of these gains are sufficient to control the load. However, there may be times when they need to be adjusted to increase or decrease the responsiveness of the 1356/1356P.

If the 1356/1356P over-reacts to changes in battery or load, lower these gains. If it is too slow to react, increase them. If the gains are set too high, the output may oscillate. Normally, the Proportional and Integral gains are increased or decreased together. It is not recommended to have one gain very high while the other is very low.

Analog Input Algorithms

The voltage range of the five analog inputs is 0–15V and is scaled as 0–4095. The analog inputs are sampled after the driver output currents have been sampled. Each analog input is filtered by a single pole exponential filter. The Filter Gain parameter is associated with the Timer Constant (TC) of the filter, which indicates how long it takes the filter to respond to a step input and reach 63% of the final value. It takes approximately 5 TCs before the filtered signal reaches its full output. The table below provides a way to estimate filter response.

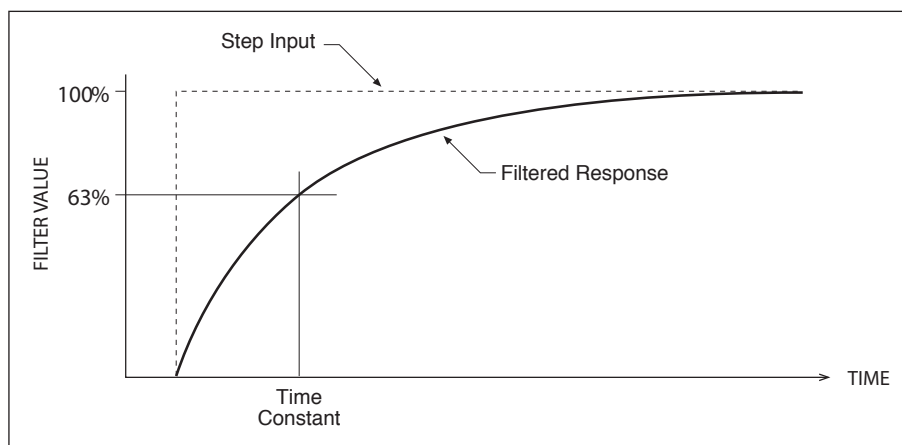

Exponential Filter Response		
Setting	TC	Time to 100%
1	64 s	320 s
2	32 s	160 s
4	16 s	80 s
8	8 s	40 s
16	4 s	20 s
32	2 s	10 s
64	1 s	5 s
128	512 ms	2.5 s
256	256 ms	1.25 s
512	128 ms	640 ms
1024	64 ms	320 ms
2048	32 ms	160 ms
4096	16 ms	80 ms
8192	8 ms	40 ms
16384	4 ms	20 ms

The analog input can be configured as the voltage input type or as a resistive input type using the Curtis programmer or an SDO. The value measured at the five analog inputs can be mapped to the two transmit (TX) PDOs as filtered voltage (in units of 0.01 V) or resistance (in units of ohms), depending on the setting of the Analog Input Type parameter. In addition, the value can also be monitored by the Curtis programmer.

MONITOR PARAMETER PROFILE OBJECTS

The Monitor Parameter Profile Objects are shown in Table 5-3.

Table 5-3 Monitor Profile Object Dictionary

PARAMETER	SDO LOCATION		RANGE CAN VALUE	DESCRIPTION
	INDEX	SUB-INDEX		
Analog1 Resistor Value	0x3100	0x00	0 – 7500 Ω 0 – 7500	Resistive type analog input value. Scale returned as 1 ohm per count.
Analog2 Resistor Value	0x3101	0x00	See above.	See above.
Analog3 Resistor Value	0x3102	0x00	See above.	See above.
Analog4 Resistor Value	0x3103	0x00	See above.	See above.
Analog5 Resistor Value	0x3104	0x00	See above.	See above.
Analog1 Voltage Value	0x3110	0x00	0.00 – 15.60 V 0 – 1560	Voltage type analog input value. Scale returned as 0.01 volt per count.
Analog2 Voltage Value	0x3111	0x00	See above.	See above.
Analog3 Voltage Value	0x3112	0x00	See above.	See above.
Analog4 Voltage Value	0x3113	0x00	See above.	See above.
Analog5 Voltage Value	0x3114	0x00	See above.	See above.
Battery Voltage	0x3120	0x00	0.0 – 120.0 V 0 – 1200	Voltage as read by the 1356/1356P.
Driver1 Current	0x3130	0x00	0.00 – 3.00 A 0 – 300	Present current sunk by Driver 1.
Driver2 Current	0x3131	0x00	0.00 – 1.00 A 0 – 100	Present current sunk by Driver 2.
Total Driver Current	0x3132	0x00	0.00 – 4.00 A 0 – 400	Present current sunk by both drivers.
PWM1	0x3140	0x00	0.0 – 100.0 % 0 – 1000	Present PWM % of Driver 1.
PWM2	0x3141	0x00	See above.	Present PWM % of Driver 2.
Hour Meter	0x3150	0x00	0 – 65535 h 0 – 65535	Present value of the hour meter.
Switch Input Status	0x3160	0x00	0 – 0x1FFF 0 – 0x1FFF	Status of switch inputs (LSB for switch Input 1: 1 = High, 0 = Low.
Virtual Digital Input Status	0x3170	0x00	0 – 0x1F 0 – 0x1F	Status of virtual switch inputs (LSB for input 1: 1 = High, 0 = Low.
5V Voltage	0x3180	0x00	0.0 – 6.3 V 0 – 63	Voltage value of the +5V output.

Table 5-3 Monitor Profile Object Dictionary, cont'd

PARAMETER	SDO LOCATION		RANGE CAN VALUE	DESCRIPTION
	INDEX	SUB-INDEX		
12V Voltage	0x3181	0x00	0.0 – 16.0 V <i>0 – 160</i>	Voltage value of the +12V output.
Ext Current	0x3182	0x00	0 – 250 mA <i>0 – 250</i>	Total current on +5V and +12V outputs.
Pulse Count	0x3190	0x00	$-2^{29} - 2^{29} - 1$ $-2^{29} - 2^{29} - 1$	Current encoder pulse count. Negative count indicates the encoder is running in the reverse direction of the zero position.
RPM	0x3191	0x00	0 – 65535 rpm <i>0 – 65535</i>	Encoder RPM in revolutions per minute when encoder is configured as RPM type.
Position	0x3192	0x00	$-32.768 - 32.767$ m $-32768 - 32767$	Calculated position value according to the pulse per meter when encoder is configured as Position type.

6 — DIAGNOSTICS AND TROUBLESHOOTING

When an error occurs in the 1356/1356P, a fault message can be monitored through the Curtis programmer. Meanwhile, an emergency message will be produced on the CAN bus according to the CANopen standard. This message will be sent once. When the fault clears, a No-Fault emergency message will be transmitted.

The fault log is accessed by SDO reads of the Standard Object at Index 0x1003. Reading the Fault Log Length sub-index 0x00 will return a value of 16 (the depth of the fault log). Reading from the sub-index 1 through 16 (0x01 – 0x10) will return the faults plus time stamps from newest to oldest. The fault log can be cleared by writing 0 to the Fault Log Length object (sub-index 0x00).

Additionally, the highest priority fault code will be flashed on the red and yellow status LEDs. The red LED enumerates the digit place, and the yellow LED enumerates the value. For example, code 23 would be displayed as one red flash, followed by two yellow flashes, followed by two red flashes, and finished with three yellow flashes. The 1356/1356P's two LEDs will display this repeating pattern:

Red	Yellow	Red	Yellow
*	* *	* *	* * *
(first digit)	(2)	(second digit)	(3)

The fault codes are listed in the troubleshooting chart (Table 6-1).

During normal operation, the yellow LED flashes continuously.

On power-up, the integrity of the code stored in memory is automatically tested. If the software is found to be corrupted, the red Status LED will flash rapidly.

The flash code can also be flashed on a single remote LED connected to the serial port. For example, code 23 would be displayed as two flashes, followed by a 500 ms delay, and finished with three flashes. The 1356/1356P will repeat this pattern at 1-second intervals.

Table 6-1 Troubleshooting Chart

Code	Fault	Description	Effect	Recovery
<i>Fast Red LED</i>	Corrupt Code	1356/1356P in a corrupted state.	1356/1356P in a Fault state.	Requires repair or new software download.
11	Internal Fault	Encryption failure.	1356/1356P in a Stopped state.	Requires repair and ATS test.
12	Flash Fault	Flash did not properly write, or Checksum did not match.	All outputs stopped.	Write to failed location and cycle KSI.
21	Over Voltage	Battery over the limit. Limit = (Nominal Voltage * 1.25) + 5V.	All outputs stopped.	Battery returns to the normal range for >1 second.
22	Under Voltage	Battery under the limit. Limit = (Nominal Voltage * 0.7). -5V when Nominal Voltage ≥24V. Limit = (Nominal Voltage * 0.7). -0.6V when Nominal Voltage =12V.	All outputs stopped.	Battery returns to the normal range for >1 second.
31	Driver1 Fault	Driver 1 is in overcurrent (>3.5 amps).	Output on the faulted driver stopped.	Send a 0% PDO command to the faulted driver.
32	Driver2 Fault	Driver 2 is in overcurrent (>1.5 amps).		
33	Coil1 Fault	Driver 1 output pin is low when the driver is Off. It implies the pin has been left open.	Output on the faulted driver is not functional.	Driver pin is reconnected.
34	Coil2 Fault	Driver 2 output pin is low when the driver is Off. It implies the pin has been left open.		
41	PDO Timeout	PDO from manager has not been received within the time out period.	All drivers are disabled, and commands cleared.	New PDO received within proper timing.
42	CAN Bus Fault	Too many CAN bus errors detected.	1356/1356P in Stopped state.	NMT received, or bus reception & transmission restored.
43	Encoder Fault	Encoder wire open.	Encoder count stopped.	Cycle KSI.
44	EEPROM Fault	The EEPROM did not properly write.	None.	Write to failed location.
45	Analog Input Fault	Analog input exceeds 15.5V (voltage input) or 7.5kΩ (resistance input).	None.	Bring analog input within range.
51	5V Supply Fail	External load impedance on +5V. Supply is too low.	None.	Bring voltage within range.
52	12V Supply Fail	External load impedance on +12V. Supply is too low.	None.	Bring voltage within range.
53	External Supply Out of Range	External load on +5V and +12V exceeds 200 mA.	None.	Bring external supply current within range.

FAULT LOG

The 1356/1356P stores the last 16 faults with a time-stamp. The Fault Log is stored in non-volatile memory, with the last fault always at the top of the log and the oldest fault at the end. If the buffer is full when a new fault occurs, the oldest fault is pushed off the log, the previous faults move down, and the newest fault is placed at the top.

The Fault Log is accessed by SDO reads of the Standard Object at Index 0x1003 (called the Pre-defined Error Field in DS301). Reading the Fault Log Length sub-index 0x00 will return a value of 16 (the depth of the fault log). Reading from the sub-index 1 through 16 (0x01 – 0x10) will return the faults plus time stamps from newest to oldest.

Faults are stored in the Fault Log as 32-bit data fields in this format:

<i>Byte5</i>	<i>Byte6</i>	<i>Byte7</i>	<i>Byte8</i>
FAULT CODE	FFH	HOUR LSB	HOUR MSB
Fault		Time Stamp	

The first byte is the fault code; see Table 6-1. The next byte indicates a fault and is consistent with the Emergency Message. If the SDO read of a fault log sub-index returns a 0 in the fault data, the fault log is clear at that location, and no fault was recorded.

The time-stamp uses the internal 16-bit running hour meter. If several error messages have occurred within one hour, the order of the fault messages will indicate which came first.

The Fault Log can be cleared by writing 0 to the Fault Log Length object (sub-index 0x00). After clearing, all the data bytes in sub-indexes 0x01 through 0x10 will be 0.

7 – SERIAL COMMUNICATIONS & PROGRAMMING

The 1356/1356P implements the ESP protocol and can support the Curtis handheld 1313 programmers and the 1314 PC programming station. In addition, it also supports the Curtis 840 Spyglass display.

The Curtis programmer can be used to adjust the programmable parameters, read various monitored values, and access fault information.

PROGRAM MENUS

The programmable parameters are arranged in hierarchical menus, as shown in Table 7-1.

Table 7-1 Program Menus: 1313 /1314 Programmer

ANALOG INPUT p. 44 – Analog1 – Input Type – High Threshold – Low Threshold – Filter Gain – Analog2 (<i>same</i>) – Analog3 (<i>same</i>) – Analog4 (<i>same</i>) – Analog5 (<i>same</i>)	DRIVER OUTPUT p. 45 – Driver1 – Operation Mode – Output Max – Current Limit – Voltage Limit – PWM Limit – Dither – Period – Amount – PI – Kp – Ki – Driver1 (<i>same</i>)	CONFIGURATION..... p. 46 – Nominal Voltage – Preset Hour – Restore Type
DIGITAL INPUT p. 44 – Input1 Debounce Time ... – Input13 Debounce Time		
ENCODER INPUT..... p. 44 – Encoder Type – Pulse Per Meter – Pulse Per Revolution – Swap Direction – Reset	CAN INTERFACE..... p. 46 – Baud Rate – Node ID – Heartbeat Rate – PDO Timeout – Emergency Rate – TPDO1 Cycle Rate – TPDO2 Cycle Rate	

ANALOG INPUT MENU*

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Input Type	0, 1	Selects the analog type: 0 = Voltage type input. 1 = Resistive type input.
High Threshold	0.0 – 15.0 V	Sets the threshold the analog input must go above to set the virtual digital input High.
Low Threshold	0.0 – 15.0 V	Sets the threshold the analog input must go below to set the virtual digital input Low.
Filter Gain	1 – 16384	Sets the amount of filtering on the input. Higher gains provide faster filtering. Filtering affects the analog reading and the virtual digital input responsiveness.

* This menu is repeated for Analog Inputs 1 – 5.

DIGITAL INPUT MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Input1 Debounce Time	8 – 1000 ms	Sets the debounce time of Digital Input 1 in 8ms steps.
Input2 Debounce Time	8 – 1000 ms	Sets the debounce time of Digital Input 2 in 8ms steps.
...		
Input13 Debounce Time	8 – 1000 ms	Sets the debounce time of Digital Input 13 in 8ms steps.

ENCODER MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Encoder Type	0 – 3	Selects the encoder type: 0 = Encoder disabled. 1 = Pulse count type. 2 = RPM type. 3 = Position type. Must cycle KSI for new encoder type to take effect.
Pulse Per Meter	0 – 65535	This parameter should be set according to the pulses per revolution and displacement per revolution of the encoder: $\text{Pulse Per Meter} = \frac{\text{pulses per revolution}}{\text{displacement per revolution (unit m)}}$
Pulse Per Revolution	0 – 65535	This parameter should be set according to the encoder specification. Must cycle KSI for the new setting to take effect.
Swap Direction	0, 1	Sets the positive phase direction: 0 = Positive phase when phase A is ahead of Phase B. 1 = Positive phase when phase B is ahead of Phase A. Must cycle KSI for the new setting to take effect.
Reset	0	Sets the encoder counter to zero.

DRIVER OUTPUT MENU*

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Operation Mode	0 – 3, 5 – 7	Selects the driver operation mode: 0 = Active High Digital Input mode. 1 = Constant Current mode. 2 = Constant Voltage mode. 3 = Direct PWM mode. 5 = Constant Current mode (with open detection). 6 = Constant Voltage mode (with open detection). 7 = Direct PWM mode (with open detection).
Current Limit	0.00 – 3.00 A <i>(Driver 1)</i> 0.00 – 1.00 A <i>(Driver 2)</i>	Sets the maximum current output when the PDO command is 100%; applicable only when the driver is operating in Constant Current mode.
Voltage Limit	0.0 – 36.0 V <i>(36V models)</i> 0.0 – 80.0 V <i>(80V models)</i>	Sets the maximum voltage output when the PDO command is 100%; applicable only when the driver is operating in Constant Voltage mode.
PWM Limit	0.0 – 100.0 %	Sets the maximum PWM output when the driver is operating in Direct PWM mode.
Dither Period	4 – 200 ms	Sets the time between dither pulses (in 2 ms steps). A dither period of 4 – 200 ms provides a frequency range of 250 – 5 Hz.
Dither Amount	0 – 500 mA	Sets the amount (+/–) of dither that will be added/subtracted from the command (in 10 mA steps).
Kp	0.1 – 100.0 %	Sets the proportional gain factor of the PI current controller.
Ki	0.1 – 100.0 %	Sets the integral gain factor of the PI current controller.

* This menu is repeated for Drivers 1 and 2.

CAN INTERFACE MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Baud Rate	-2 – 4	<p>Sets the CAN baud rate:</p> <ul style="list-style-type: none"> -2 = 50 kbit/s. -1 = 100 kbit/s. 0 = 125 kbit/s. 1 = 250 kbit/s. 2 = 500 kbit/s. 3 = 800 kbit/s. 4 = 1 Mbit/s. <p>Must cycle KSI or send an NMT Reset for the new rate to take effect.</p>
Node ID	1 – 127	<p>Sets the Node ID for the 1356 /1356P.</p> <p>Must cycle KSI or send an NMT Reset 1356/1356P or an NMT Reset CAN for the new ID to take full effect.</p>
Heartbeat Rate	0 – 1000 ms	<p>Sets the cyclic repetition rate of the heartbeat message in 4 ms steps. Setting this parameter to zero disables the heartbeat.</p>
PDO Timeout	0 – 1000 ms	<p>Sets the time interval, in 4 ms steps, within which the PDO-RX must be received. If the interval is longer than this set interval, a fault is flagged. Setting this parameter to zero disables the PDO timeout fault.</p>
Emergency Rate	0 – 1000 ms	<p>Sets the minimum time, in 4ms steps, the time that must elapse before the 1356/1356P can send another emergency message. Setting this parameter to zero disables the emergency message.</p>
TPDO1 Cycle Rate	0 – 1000 ms	<p>Sets the periodic transmit rate of the PDO1 TX in 4 ms steps. Setting this parameter to zero disables the PDO1 TX periodic transmission, and PDO1 TX replies to the PDO1 RX in Manager/Ancillary mode.</p>
TPDO2 Cycle Rate	0 – 1000 ms	<p>Sets the periodic transmit rate of the PDO2 TX in 4 ms steps. Setting this parameter to zero disables the PDO2 TX periodic transmission, and PDO2 TX replies to the PDO2 RX in Manager/Ancillary mode.</p>

CONFIGURATION MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Nominal Voltage	1 – 3 <i>(36V models)</i> 3 – 7 <i>(80V models)</i>	<p>Sets the nominal voltage, which is used in fault detection.</p> <ul style="list-style-type: none"> 1 = 12 V. 2 = 24 V. 3 = 36 V. 4 = 48 V. 5 = 60 V. 6 = 72 V. 7 = 80 V.
Preset Hour	0 – 65535 h	<p>Presets hours of the hour meter and resets the minutes to zero.</p>
Restore Type	1, 2	<p>This parameter is used to select the source of the parameters when the 1356/1356P is powered on.</p> <ul style="list-style-type: none"> 1 = Load parameters from the Backup parameter block. 2 = Load parameters from the Normal parameter block. <p>The default value for this parameter is 2. When it is programmed to 1, the 1356 /1356P will load all backup parameters after cycling KSI, and then the Restore Type value will reset to 2.</p>

MONITOR MENUS

Through its monitor menus, the Curtis programmer provides access to real-time data during vehicle operation. This information is helpful during diagnostics and troubleshooting and also while adjusting programmable parameters.

The monitored variables are arranged in hierarchical menus, as shown in Table 7-2.

Table 7-2 Monitor Menus: 1313 /1314 Programmer

DRIVER OUTPUT..... p. 48 – Driver1 – Current – PWM – Driver2 (<i>same</i>) – Total Current	DIGITAL INPUT..... p. 48 – Input1 . . . – Input13	BATTERY VOLTAGE..... p. 49
ANALOG INPUT..... p. 48 – Analog1 – Voltage – Resistance – Virtual Digital – Analog2 (<i>same</i>) – Analog3 (<i>same</i>) – Analog4 (<i>same</i>) – Analog5 (<i>same</i>)	ENCODER INPUT..... p. 48 – Pulse Counts – RPM – Position	HOURLY METER..... p. 49 – Hours – Minutes
	POWER SUPPLY OUTPUT..... p. 49 – 5V – 12V – EXT Current	

DRIVER OUTPUT MONITOR MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Driver1 Current	0.00 – 3.50 A	Current sunk by Driver 1.
Driver1 PWM	0.0 – 100.0 %	PWM % of Driver 1.
Driver2 Current	0.00 – 1.50 A	Current sunk by Driver 2.
Driver2 PWM	0.0 – 100.0 %	PWM % of Driver 2.
Total Current	0.00 – 5.00 A	Total current of both drivers.

ANALOG INPUT MONITOR MENU*

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Voltage	0.0 – 15.6 V	For modules that are configured as voltage input types, this variable displays the input voltage value.
Resistance	0 – 7500 Ω	For modules that are configured as resistive input types, this variable displays the input resistance value.
Virtual Digital	Off, On	Virtual Digital Input state.

*This menu is repeated for Analog Inputs 1 – 5.

DIGITAL INPUT MONITOR MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Input1	Off, On	Input state of Digital Input 1.
Input2	Off, On	Input state of Digital Input 2.
...		
Input13	Off, On	Input state of Digital Input 13.

ENCODER INPUT MONITOR MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Pulse Counts	$-2^{29} - 2^{29} - 1$	Current encoder pulse counts. Negative counts indicate the encoder is running in the reverse direction of the zero position.
RPM	0 – 65535 rpm	Displays RPM when the encoder type is configured as RPM mode.
Position	$-32.768 - 32.767$ m	Displays position when the encoder type is configured as Position mode. Negative counts indicate the encoder is running in the reverse direction of the zero position.

POWER SUPPLY OUTPUT MONITOR MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
+5V	0.0 – 6.3 V	Voltage of the +5V output.
+12V	0.0 – 16.0 V	Voltage of the +12V output.
EXT Current	0 – 250 mA	Combined current of the external +12V and +5V power supplies.

BATTERY VOLTAGE MONITOR MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Battery Voltage	0.0 – 120.0 V	Voltage of the battery.

HOUR METER MONITOR MENU

PARAMETER	ALLOWABLE RANGE	DESCRIPTION
Hours	0 – 65535 h	Present hours of the hour meter. The hour meter runs all the time the 1356/1356P is powered on.
Minutes	0 – 59 min	Present minutes of the hour meter.

FAULT MENU

The Curtis programmer provides a convenient way to access fault information; see Section 6: Faults and Diagnostics. The programmer displays the faults by name. It displays all faults that are currently set and also a history of all the faults that have been set since the history log was last cleared.

APPENDIX A

DESIGN CONSIDERATIONS

ELECTROMAGNETIC COMPATIBILITY (EMC)

Electromagnetic compatibility (EMC) encompasses two areas: emissions and immunity. *Emissions* are radio frequency (RF) energy generated by a product. This energy has the potential to interfere with communications systems such as radio, television, cellular phones, dispatching, aircraft, etc. *Immunity* is the ability of a product to operate normally in the presence of RF energy. EMC is ultimately a system design issue. Part of the EMC performance is designed into or inherent in each component; another part is designed into or inherent in end product characteristics such as shielding, wiring, and layout; and, finally, a portion is a function of the interactions between all these parts. The design techniques presented below can enhance EMC performance in products that use Curtis control products.

Emissions

Signals with high-frequency content can produce significant emissions if connected to a large enough radiating area (created by long wires spaced far apart). PWM drivers can contribute to RF emissions. Pulse width modulated square waves with fast rise and fall times are rich in harmonics. (Note: PWM drivers at 100% do not contribute to emissions.) The impact of these switching waveforms can be minimized by making the wires from the controller to the load as short as possible and by placing the load drive and return wires near each other.

For applications requiring very low emissions, the solution may involve enclosing the system, interconnecting wires, and loads together in one shielded box. Emissions can also couple to battery supply leads and circuit wires outside the box, so ferrite beads near the controller may also be required on these unshielded wires in some applications. It is best to keep the noisy signals as far as possible from sensitive wires.

Immunity

Immunity to radiated electric fields can be improved either by reducing overall circuit sensitivity or by keeping undesired signals away from this circuitry. The controller circuitry itself cannot be made less sensitive since it must accurately detect and process low-level signals from sensors such as the throttle potentiometer. Thus immunity is generally achieved by preventing the external RF energy from coupling into sensitive circuitry. This RF energy can get into the controller circuitry via conducted and radiated paths. Conducted paths are created by the wires connected to the controller. These wires act as antennas, and the amount of RF energy coupled into them is generally proportional to their length. The RF voltages and currents induced in each wire are applied to the controller pin to which the wire is connected.

The Curtis 1356/1356P includes bypass capacitors on the printed circuit board's sensitive input signals to reduce the impact of this RF energy on the internal circuitry. In some applications, additional filtering in the form of ferrite beads may also be required on various wires to achieve desired performance levels. A full metal enclosure can also improve immunity by shielding the 1356/1356P from outside RF energy.

ELECTROSTATIC DISCHARGE (ESD)

Curtis products, like most modern electronic devices, contain ESD-sensitive components, and it is therefore necessary to protect them from ESD (electrostatic discharge) damage. Most of the product's signal connections have protection for moderate ESD events but must be protected from damage if higher levels exist in a particular application.

ESD immunity is achieved either by providing sufficient distance between conductors and the ESD source so that a discharge will not occur or by providing an intentional path for the discharge current such that the circuit is isolated from the electric and magnetic fields produced by the discharge. The guidelines presented above for increasing radiated immunity will also provide increased ESD immunity.

It is usually easier to prevent the discharge from occurring than to divert the current path. A fundamental technique for ESD prevention is to provide adequately thick insulation between all metal conductors and the outside environment so that the voltage gradient does not exceed the threshold required for a discharge to occur. If the current diversion approach is used, all exposed metal components must be grounded. The shielded enclosure, if properly grounded, can be used to divert the discharge current; it should be noted that the location of holes and seams can have a significant impact on ESD suppression. If the enclosure is not grounded, the path of the discharge current becomes more complex and less predictable, especially if holes and seams are involved. Some experimentation may be required to optimize the selection and placement of holes, wires, and grounding paths. Careful attention must be paid to the control panel design so that it can tolerate a static discharge. MOV, Transorbs, or other devices can be placed between B- and offending wires, plates, and touchpoints if ESD shock cannot be otherwise avoided.

APPENDIX B

PROGRAMMING DEVICES

Curtis programmers provide programming, diagnostic, and test capabilities for the 1356/1356P. The power for operating the programmer is supplied by the host 1356/1356P via a 4-pin connector. When the programmer powers up, it gathers information from the 1356/1356P.

Two types of programming devices are available: the 1314 PC Programming Station and the 1313 handheld programmer. The Programming Station has the advantage of a large, easily read screen; on the other hand, the handheld programmer has the advantage of being more portable and hence convenient for making adjustments in the field.

Both programmers are available in User, Service, Dealer, and OEM versions. Each programmer can perform the actions available at its own level and the levels below that—a User-access programmer can operate at only the User level, whereas an OEM programmer has full access.

PC PROGRAMMING STATION (1314)

The Programming Station is an MS-Windows 32-bit application that runs on a standard Windows PC. Instructions for using the Programming Station are included with the software.

HANDHELD PROGRAMMER (1313)

The 1313 handheld programmer is functionally equivalent to the PC Programming Station; operating instructions are provided in the 1313 manual. This programmer replaces the 1311, an earlier model with fewer functions.

PROGRAMMER FUNCTIONS

Programmer functions include:

Parameter adjustment — provides access to the individual programmable parameters.

Monitoring — presents real-time values during vehicle operation; these include all inputs and outputs.

Diagnostics and troubleshooting — present diagnostic information and a means to clear the fault history file.

Programming — allows you to save/restore custom parameter settings.

Favorites — allows you to create shortcuts to your frequently-used adjustable parameters and monitor variables.

APPENDIX C

SPECIFICATIONS

Table C-1 SPECIFICATIONS: 1356/1356P MODULE

- Nominal input voltage:** 12 – 36 V, 36 – 80 V.
- Storage ambient temperature range:** –40°C to 85°C (–40°F to 185°F).
- Operating ambient temp. range:** –40°C to 50°C (–40°F to 122°F).
- Voltage limits:** 12–36V models 36–80V models
- Nominal voltage range:** 8.5–40 V 25–100 V
- Overvoltage cutoff:** > 50 V >105 V
- Undervoltage cutoff:** <7.5 V < 20 V
- Enclosure protection rating:** 1356P only: IP65 water/dust immunity (for electronics).
- Weight:** 1356: 0.05 kg.
1356P: 0.14 kg.
- Dimensions (L×W×H):** 1356: 100 × 70 × 16.3 mm.
1356P: 126 × 80 × 25 mm.
- EMC:** Designed to the requirements of EN 12895: 2000, Industrial Trucks Electromagnetic Compatibility.
- Safety:** Designed to the requirements of:
EN ISO13849-1: 2006 Safety of Machinery, Safety-related Parts of Control System, Part 1, and EN 1175-1:1998+A1: 2010 Safety of Industrial Trucks, Electrical Requirements, Part 1.

MODEL NUMBER	VOLTAGE (volts)	DESCRIPTION
1356-4101	12 – 36 V	No terminal resistor between CAN H and CAN L.
1356-4102	12 – 36 V	120 Ω terminal resistor between CAN H and CAN L.
1356-6101	36 – 80 V	No terminal resistor between CAN H and CAN L.
1356-6102	36 – 80 V	120 Ω terminal resistor between CAN H and CAN L.
1356P-4101	12 – 36 V	No terminal resistor between CAN H and CAN L.
1356P-4102	12 – 36 V	120 Ω terminal resistor between CAN H and CAN L.
1356P-6101	36 – 80 V	No terminal resistor between CAN H and CAN L.
1356P-6102	36 – 80 V	120 Ω terminal resistor between CAN H and CAN L.